RNAV (GPS) RWY 26R

MIAMI INTL (MIA)

WAAS	APP CRS	Rwy Idg	8600
CH 86903	272°	TDZE	9
W26A		Apt Elev	9

RNP APCH - GPS.

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15	124.85 322.3	118.3 256.9	121.8 (Rwys 8L/R, 12, 26L/R) 348.6	135.35	
DEP 133.675			127.5 (Rwys 9, 27, 30)		

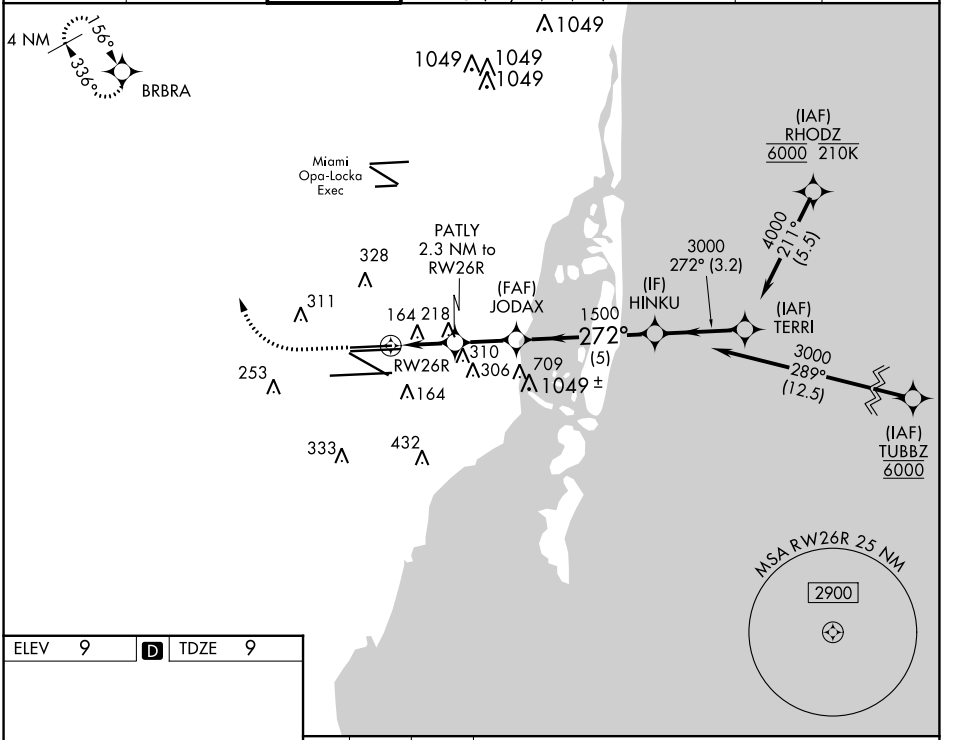

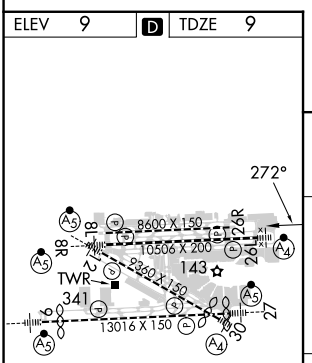

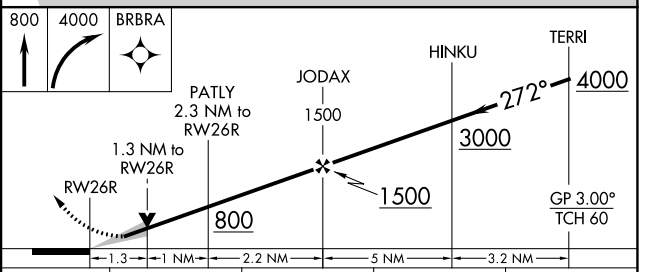

CATEGORY	A	B	C	D
LPV DA	265-¾ 256 (300-¾)			
LNAV/VNAV DA	432-1¼ 423 (500-1¼)			
LNAV MDA	480-1 471 (500-1)		480-1⅜ 471 (500-1⅜)	

SE-3, 31 OCT 2024 to 28 NOV 2024
SE-3, 31 OCT 2024 to 28 NOV 2024