WYNGS FIVE DEPARTURE (RNAV)

(WYNGS5.WYNGS) 31DEC20

RONALD REAGAN WASHINGTON NTL (DCA)

WASHINGTON, DC

D-ATIS
132.65
CLNC DEL
128.25
CPDLC
GND CON
121.7 257.6
WASHINGTON TOWER
119.1 257.6
POTOMAC DEP CON
118.95 257.2

TAKEOFF MINIMUMS:
Rwy 1: Standard with minimum climb of 825′ per NM to 600.
Rwys 15, 19: Standard with minimum climb of 500′ per NM to 515.
Rwy 33: Standard with minimum climb of 540′ per NM to 640.

TOP ALTITUDE: 5000

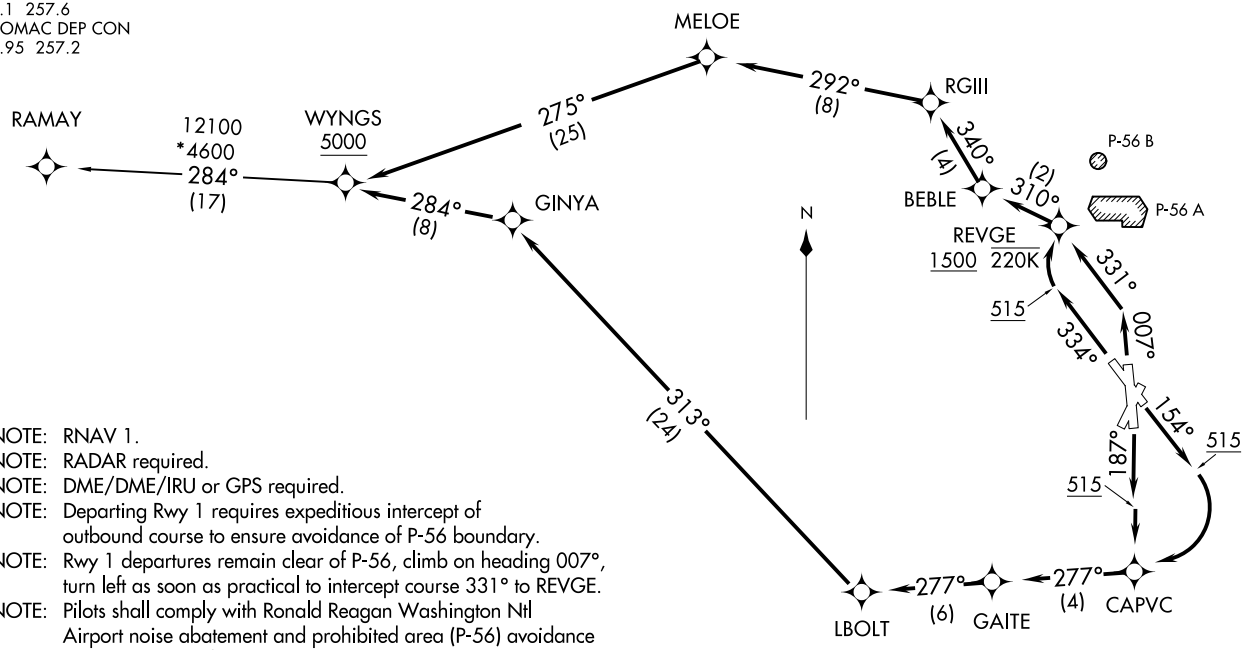

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Departing Rwy 1 requires expeditious intercept of outbound course to ensure avoidance of P-56 boundary.
NOTE: Rwy 1 departures remain clear of P-56, climb on heading 007°, turn left as soon as practical to intercept course 331° to REVGE.
NOTE: Pilots shall comply with Ronald Reagan Washington Ntl Airport noise abatement and prohibited area (P-56) avoidance procedures as defined in the Chart Supplement Special Notices.
NOTE: Turbo-jets only.
NOTE: If unable to accept climb rate advise ATC on initial contact.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

WYNGS FIVE DEPARTURE (RNAV)

(WYNGS5.WYNGS) 21112

RONALD REAGAN WASHINGTON NTL (DCA)

AL-443 (FAA)

WASHINGTON, DC