RNAV (RNP) Z RWY 31

CORPUS CHRISTI INTL (CRP)

APP CRS	Rwy Idg	7510
312°	TDZE	43
	Apt Elev	46

For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS and RF required. For inop MALSR, increase RNP 0.14 all Cats visibility to ⅞ mile.
*Missed approach requires minimum climb of 335 feet per NM to 500.

MALSR

MISSED APPROACH: Climb to 2000 on track 312° to ATHIS and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON	CLNC DEL
126.8	120.9 348.725	119.4 257.8	121.9 269.15	118.55

SKIDS
4000
164° (10.3)
110°
ATHIS
290°
4 NM
(IAF)
EJUXO
(RNP 0.50)
4000
164° (10.7)

Procedure NA for arrivals on CRP VORTAC airway radials 169 CW 184.

(IAF)
COPAN
(RNP 0.50)
4000
219° (20.5)

(IAF)
CORPUS CHRISTI
CRP
(RNP 0.50)
4000
186° (5.7)

MSA RW31 25 NM
2200

FEDEB
4000
135° (5.9)
312° (25.9)

(IF)
RIXMU
470
423
358
3200
222° (2.7)
PIVGY
Max 180 KIAS
1050
1048
2400
133° (8)
2400 (3.5)

CUNRO
562±
508
4000
218° (2.9)

(IF)
ZUNER

RW31
250
QODLU
312° (1.7)
(1.7)

Cuddihy (Pvt)
Cabaniss Field NOLF

SIWOC
Max 180 KIAS
1051
1200 (5.3)
(FAF)
NIGBE

ELEV 46 D TDZE 43

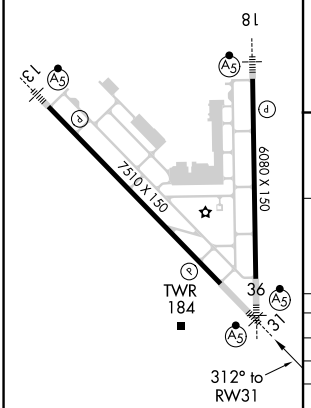

HIRL Rwys 13-31 and 18-36

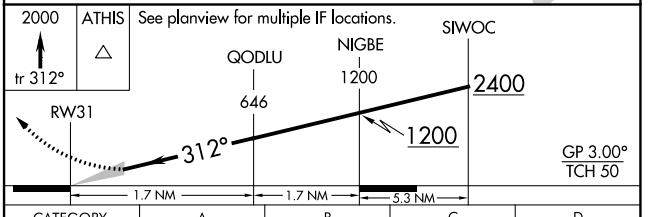

CATEGORY	A	B	C	D
RNP 0.14 DA*		303-½	260 (300-½)	
RNP 0.30 DA		384-⅝	341 (400-⅝)	

AUTHORIZATION REQUIRED

SC-3, 31 OCT 2024 to 28 NOV 2024
SC-3, 31 OCT 2024 to 28 NOV 2024