


WAAS CH <b>93824</b> <b>W04A</b>	APP CRS <b>043°</b>	Rwy Idg TDZE <b>253</b> Apt Elev <b>257</b>	<b>6000</b>
--	------------------------	---	-------------

# RNAV (GPS) RWY 4

DOUGLAS MUNI (DQH)




RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to 7/8 SM and LNAV Cat C and D visibility to 1 SM.

MALSR 

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OLHUP and hold.

AWOS-3 <b>119.075</b>	JACKSONVILLE CENTER <b>127.575 269.025</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	---	---------------------------------

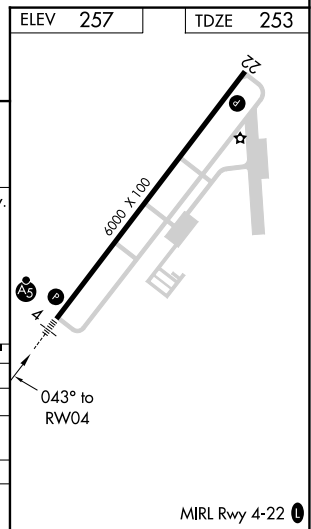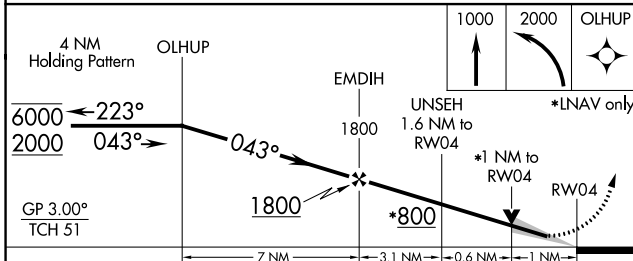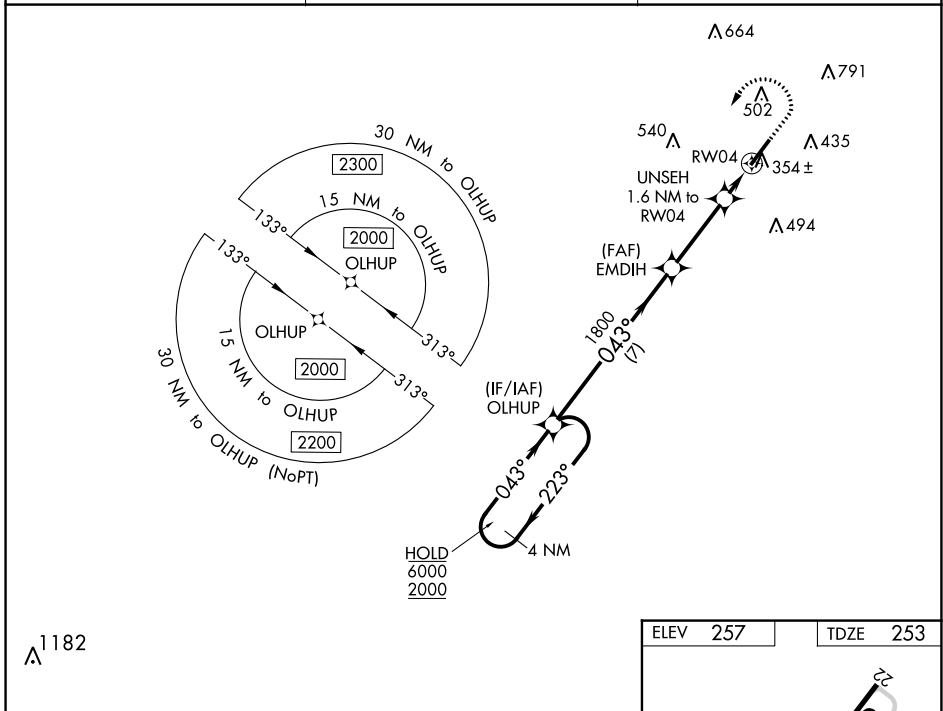

CATEGORY	A	B	C	D
LPV DA		453-1/2	200 (200-1/2)	
LNAV/VNAV DA		538-1/2	285 (300-1/2)	
LNAV MDA	620-1/2	367 (400-1/2)	620-5/8	367 (400-5/8)
CIRCLING	720-1	820-1	960-2	1160-3
	463 (500-1)	563 (600-1)	703 (800-2)	903 (1000-3)