
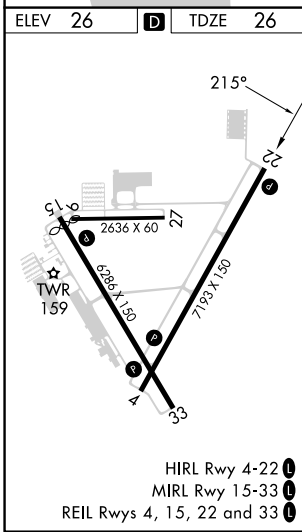


WAAS CH <b>45905</b> <b>W22A</b>	APP CRS <b>215°</b>	Rwy Idg TDZE <b>26</b> Apt Elev <b>26</b>	<b>7193</b>
--	------------------------	---	-------------

# RNAV (GPS) RWY 22

PUNTA GORDA (PGD)

RNP APCH.		<p>Baro-VNAV NA when using Page Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 276, LNAV/VNAV DA to 360, and all MDAs 60 feet; increase LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM.</p>			<p>MISSED APPROACH: Climb to 2000 direct BULOW and hold.</p>	
ATIS ★ <b>135.675</b>	FORT MYERS APP CON ★ <b>127.05 306.2</b>	PUNTA GORDA TOWER ★ <b>121.0 (CTAF) 0</b>	GND CON <b>119.55</b>	CLNC DEL <b>119.55</b>	CLNC DEL <b>127.05</b> (When twr closed)	UNICOM <b>122.975</b>

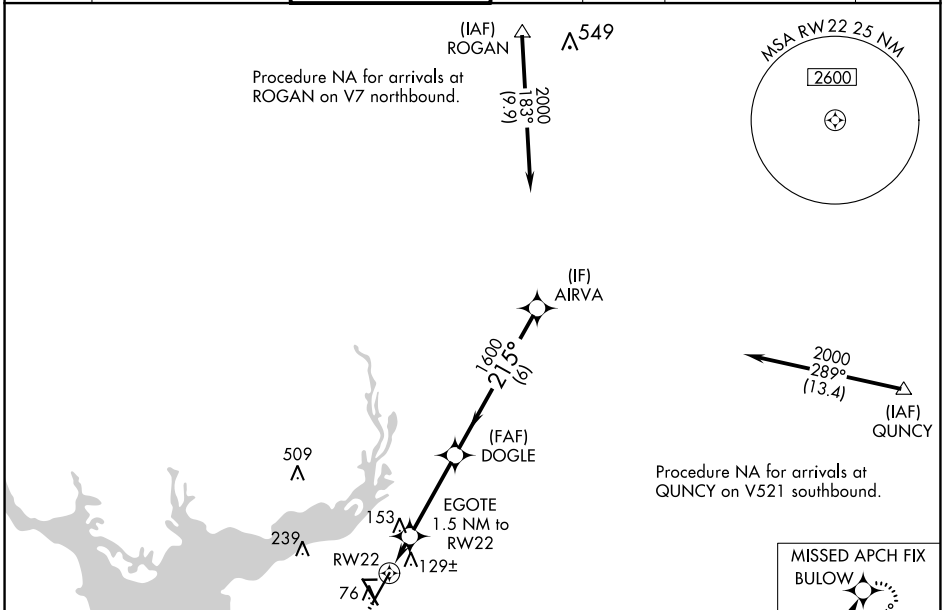

2000	BULOW	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 31).		AIRVA
*LNAV only.		EGOTE 1.5 NM to RW22	DOGLE 1600	2000
		RW22	1600	215°
		540*	1600	GP 3.00° TCH 40
		-1.5 NM	3.3 NM	6 NM
CATEGORY	A	B	C	D
LPV DA	226-3/4		200 (200-3/4)	
LNAV/VNAV DA	310-1		284 (300-1)	
LNAV MDA	420-1	394 (400-1)	420-1 1/8 394 (400-1 1/8)	
CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 1/2 574 (600-1 1/2)	740-2 1/4 714 (800-2 1/4)

SE-3, 31 OCT 2024 to 28 NOV 2024

SE-3, 31 OCT 2024 to 28 NOV 2024