


LOC I-MIA <b>109.5</b>	APP CRS <b>272°</b>	Rwy Idg <b>12755</b> TDZE <b>9</b> Apt Elev <b>9</b>
---------------------------	------------------------	--

# ILS or LOC RWY 27

MIAMI INTL (MIA)

DME required. RNP APCH-GPS. From TUBBZ.		MALSRL 	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on heading 290° and DHP VORTAC R-335 to BRBRA/DHP 11.5 DME and hold, continue climb-in-hold to 4000.
 Simultaneous approach authorized. Inop table does not apply to S-LOC 27 Cats C/D. * RVR 1800 authorized with use of FD or AP or HUD to DA.			

D-ATIS ARR <b>119.15</b> DEP <b>133.675</b>	MIAMI APP CON <b>124.85 322.3</b>	MIAMI TOWER <b>118.3 256.9</b>	GND CON <b>121.8</b> (8L/8R/12/26L/26R) <b>127.5</b> (9/27/30)	<b>348.6</b>	CLNC DEL <b>135.35</b>	CPDLC
---	--------------------------------------	-----------------------------------	--	--------------	---------------------------	-------

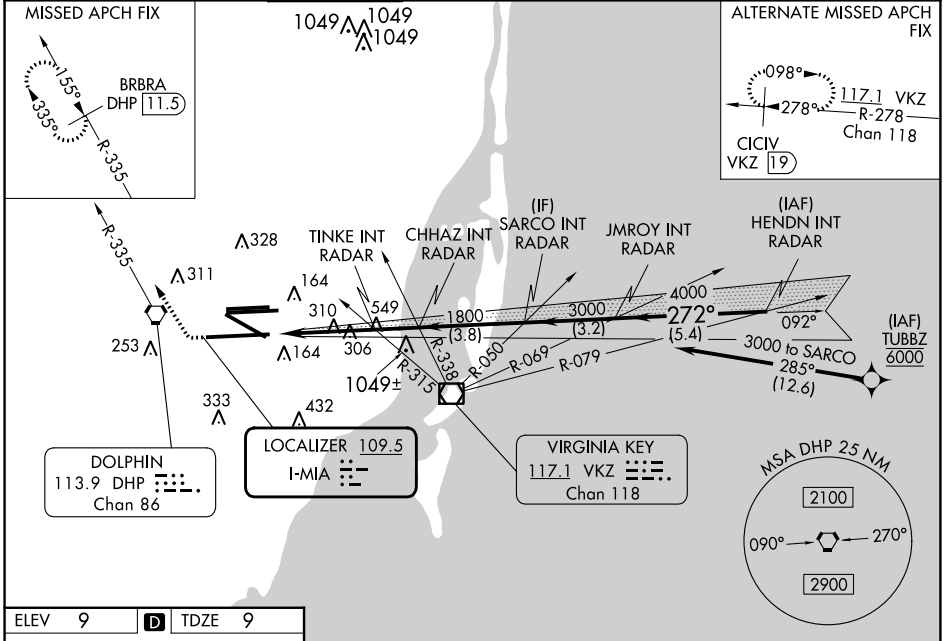

ELEV 9	<b>D</b>	TDZE 9			
TDZ/CL Rwy 8R REIL Rwys 8L and 26R HIRL all Rwys					
FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

800	4000	DHP R-335	BRBRA DHP 11.5	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).	HENDN INT RADAR
CATEGORY	A	B	C	D	
S-ILS 27 *	209/24 200 (200-1/2)				
S-LOC 27	1300/40 1291 (1300-3/4)	1300/55 1291 (1300-1)	1300-3	1291 (1300-3)	
TINKE FIX MINIMUMS (DUAL VOR RECEIVERS OR RADAR REQUIRED)					
S-LOC 27	560/24 551 (600-1/2)		560/60 551 (600-1/4)		

SE-3, 28 NOV 2024 to 26 DEC 2024

SE-3, 28 NOV 2024 to 26 DEC 2024