VORTAC GEP	APP CRS	Rwy Idg	5000
117.3	084°	TDZE	910
Chan 120		Apt Elev	912

VOR RWY 9

ANOKA COUNTY/BLAINE (JANES FLD) (ANE)

When local altimeter setting not received, use Crystal altimeter setting: increase all MDA 40 feet and increase S-9 visibility Cat C/D ⅛ SM and Circling Cat D ¼ SM. VDP NA when using Crystal altimeter setting.

MISSED APPROACH: Climbing left turn to 3000 direct GEP VORTAC and hold.

ATIS	MINNEAPOLIS APP CON	ANOKA TOWER*	GND CON	CLNC DEL	CLNC DEL	UNICOM
120.625	126.5 335.65	132.4 (CTAF) L	121.85	121.3	121.85 (When twr closed)	122.95

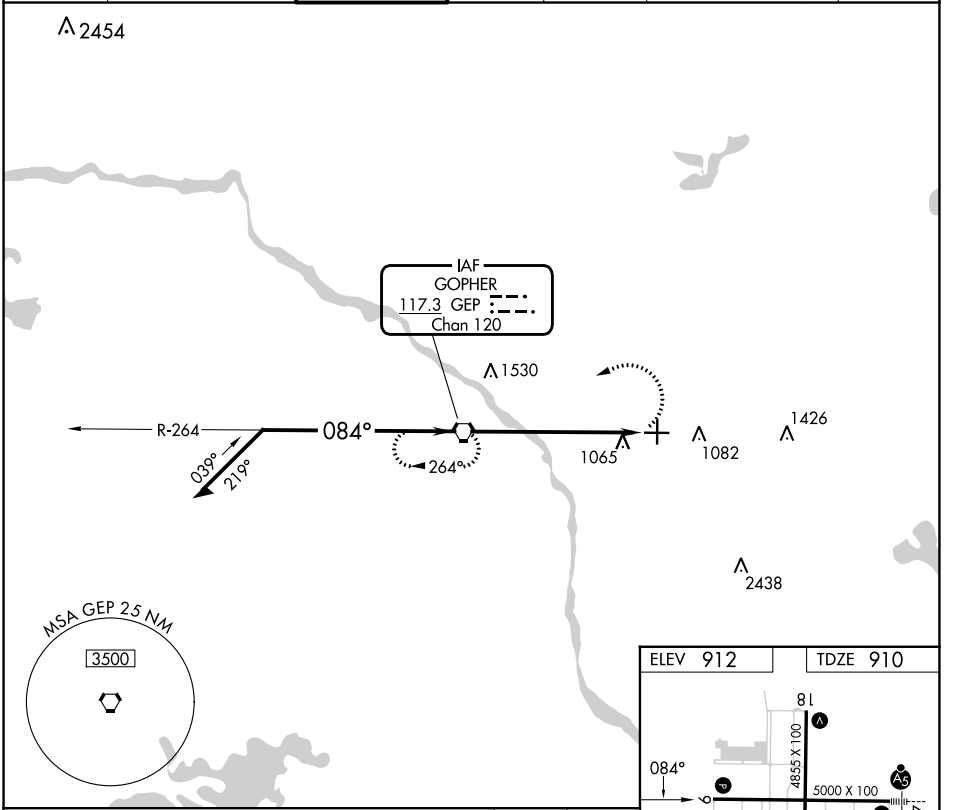

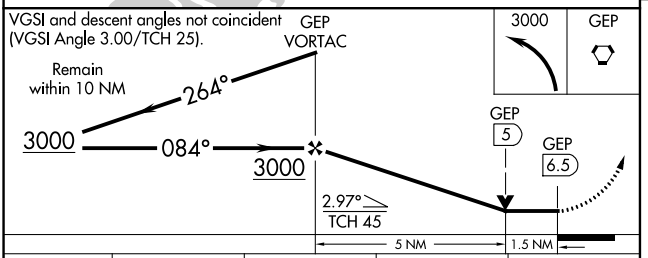

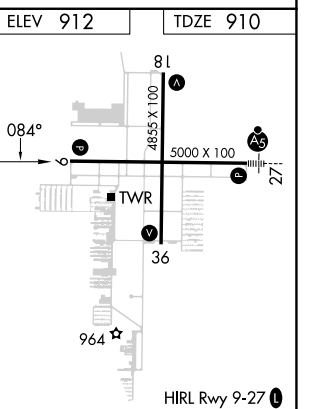

CATEGORY	A	B	C	D
S-9	1400-1	490 (500-1)	1400-1⅜	490 (500-1⅜)
C CIRCLING	1400-1	488 (500-1)	1460-1½	1580-2
			548 (600-1½)	668 (700-2)

FAF to MAP 6.5 NM

Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

NC-1, 28 NOV 2024 to 26 DEC 2024
NC-1, 28 NOV 2024 to 26 DEC 2024