


APP CRS	Rwy Idg	7002
107°	TDZE	413
	Apt Elev	413

RNAV (GPS) RWY 12R

ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS				MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.	
<p>▼ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase RNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¼ SM NA.</p>					
ATIS	ST LOUIS APP CON	DOWNTOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL
121.45	123.7 371.875	119.925 (CTAF) 0 379.3	121.8	118.275	121.8 (When twr closed)
					UNICOM
					122.95

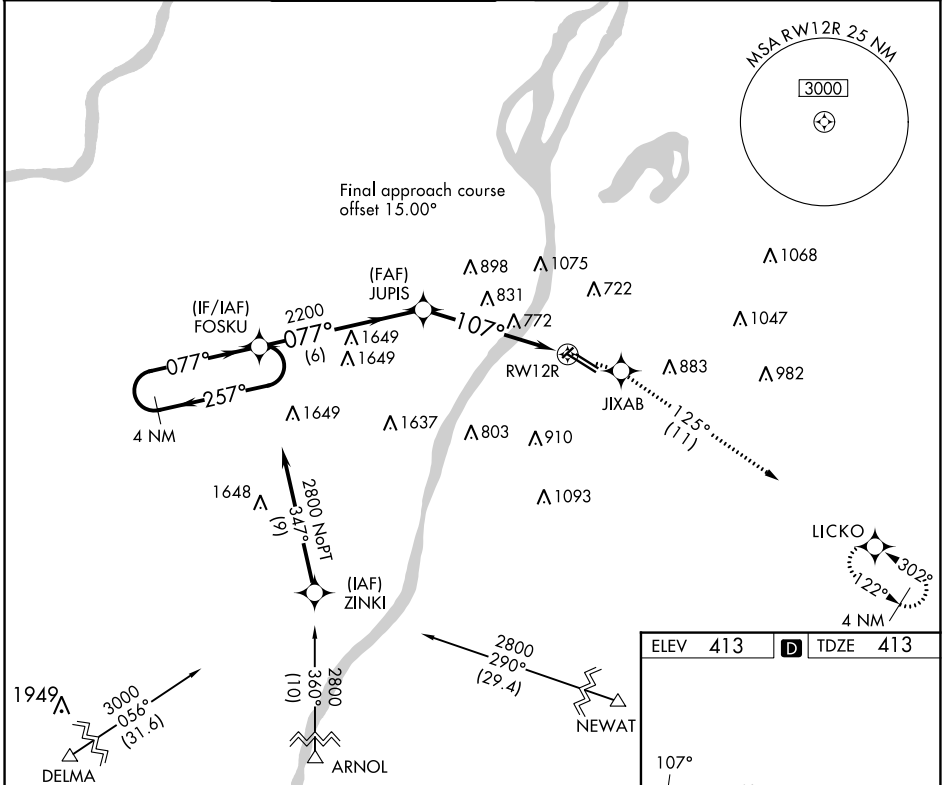

EC-3, 28 NOV 2024 to 26 DEC 2024

EC-3, 28 NOV 2024 to 26 DEC 2024

ELEV	413	TDZE	413
------	-----	------	-----

4 NM Holding Pattern	FOSKU	JUPIS	JIXAB	LICKO
2800	← 257°	077°	2200	tr 125°
VDP NA when using St Louis Lambert Intl altimeter setting.	6 NM	3.3 NM	2.1 NM	2.1 NM to RWY 12R
CATEGORY	A	B	C	D
RNAV MDA	1140-1 727 (800-1)	1140-2 727 (800-2)	1140-2 ¼ 727 (800-2 ¼)	1140-2 ¼ 727 (800-2 ¼)
CIRCLING	1140-1 727 (800-1)	1240-2 ½ 827 (900-2 ½)	1380-3 967 (1000-3)	1380-3 967 (1000-3)