RNAV (RNP) Y RWY 9

GEORGE BUSH INTCNTL/HOUSTON (IAH)

APP CRS	Rwy Idg	10000
087°	TDZE	91
	Apt Elev	96

For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. For inop MALSR, increase all Cats visibility to 1⅜ mile. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct JEBOX and hold.

D-ATIS	HOUSTON APP CON	HOUSTON TOWER	GND CON	CLNC DEL	CPDLC
124.05	120.05 379.1 EAST 124.35 316.15 WEST	135.15 290.2	118.575	128.1	

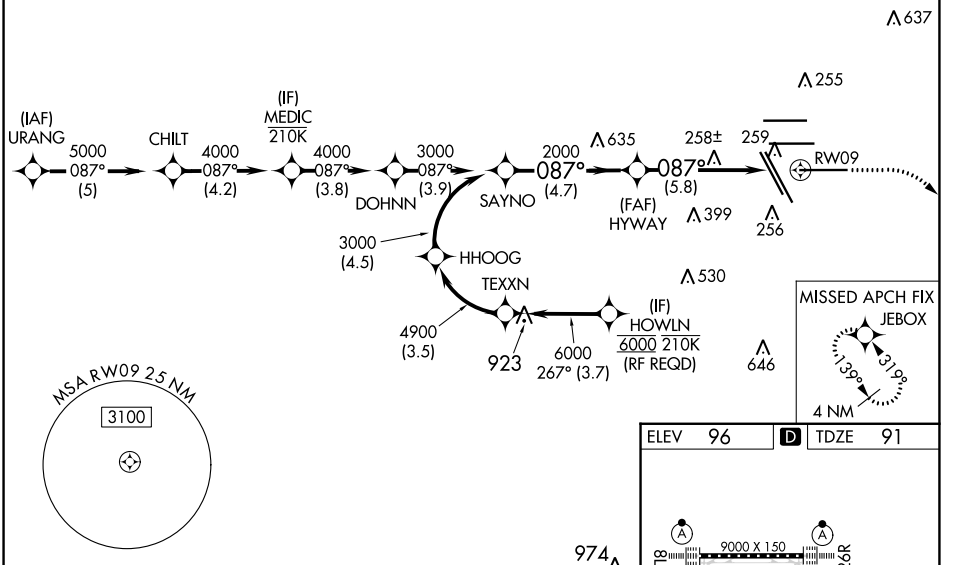

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

580 | 3000 | JEBOX

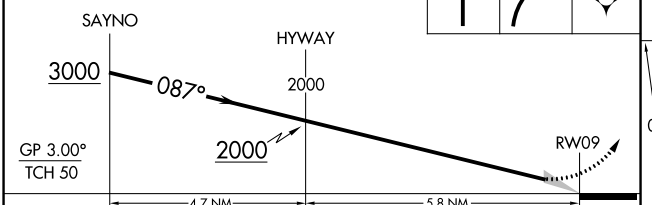

CATEGORY	A	B	C	D
RNP 0.30 DA	516/49 425 (500-1)			

AUTHORIZATION REQUIRED

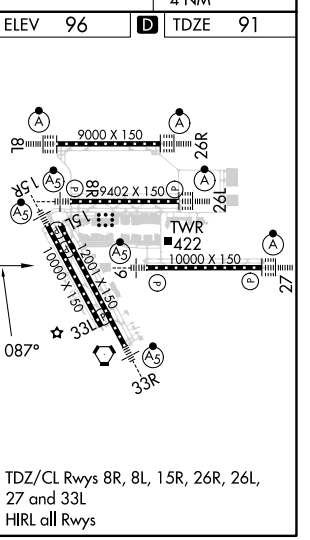

TDZ/CL Rwys 8R, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rwys

SC-5, 28 NOV 2024 to 26 DEC 2024
SC-5, 28 NOV 2024 to 26 DEC 2024