RNAV (GPS) RWY 28

STATESVILLE RGNL (SVH)

WAAS	APP CRS	Rwy Idg	6453
CH 60903	285°	TDZE	967
W28A		Apt Elev	968

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lincolnton altimeter setting and increase LPV DA to 1218, LNAV/VNAV DA to 1269, and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ , and Circling Cat C ¼ mile. VDP and Baro-VNAV NA when using Lincolnton altimeter setting. For inop MALSR, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to ⅞ mile. For inop MALSR when using Lincolnton altimeter setting, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 1380 then climbing right turn to 3400 direct SANFI and hold.

AWOS-3	ATLANTA CENTER	UNICOM
119.225	125.15 263.0	123.075 (CTAF) L

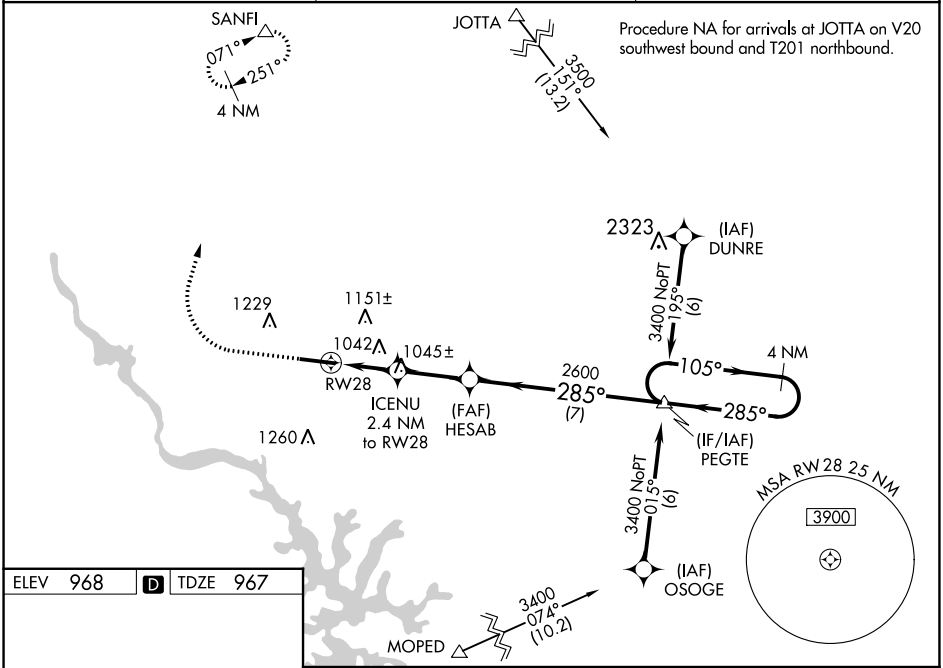

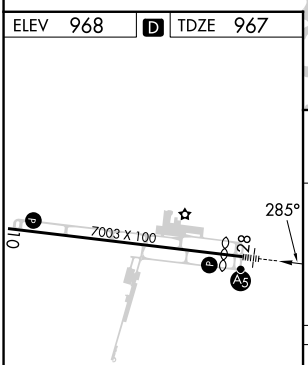

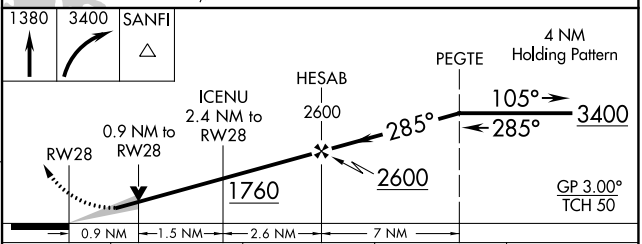

CATEGORY	A	B	C	D
LPV DA	1167-¾		200 (200-¾)	
LNAV/VNAV DA	1218-¾		251 (300-¾)	
LNAV MDA	1300-¾		333 (400-¾)	
C CIRCLING	1420-1 452 (500-1)	1540-1 572 (600-1)	1540-1½ 572 (600-1½)	1560-2 592 (600-2)

REIL Rwy 10 L
HIRL Rwy 10-28 L

SE-2, 28 NOV 2024 to 26 DEC 2024
SE-2, 28 NOV 2024 to 26 DEC 2024