




|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>63138</b><br><b>W13A</b> | APP CRS<br><b>136°</b> | Rwy ldg <b>3401</b><br>TDZE <b>754</b><br>Apt Elev <b>754</b> |
|--|------------------------|---|

# RNAV (GPS) RWY 13

WASHINGTON MUNI (A WG)

|           |   |  |
|-----------|---|--|
| RNP APCH. | <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).</p> <p>▲ Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting; increase LPV DA to 1066 feet, LNAV/VNAV DA to 1282 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.</p> | MISSED APPROACH:<br>Climb to 3000 direct KILKE and hold. |
|-----------|---|--|

|                          |                                       |                                 |
|--------------------------|---------------------------------------|---------------------------------|
| AWOS-3<br><b>127.825</b> | CHICAGO CENTER<br><b>135.6 370.95</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|--------------------------|---------------------------------------|---------------------------------|

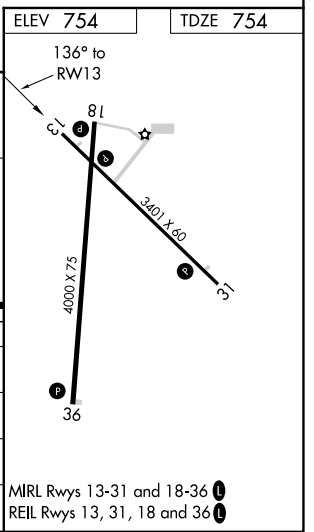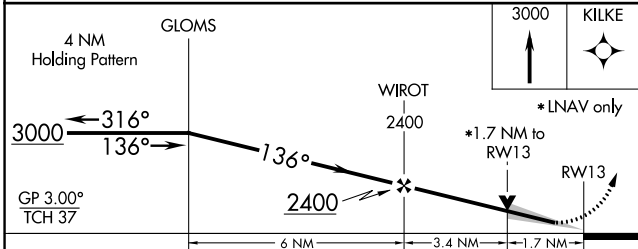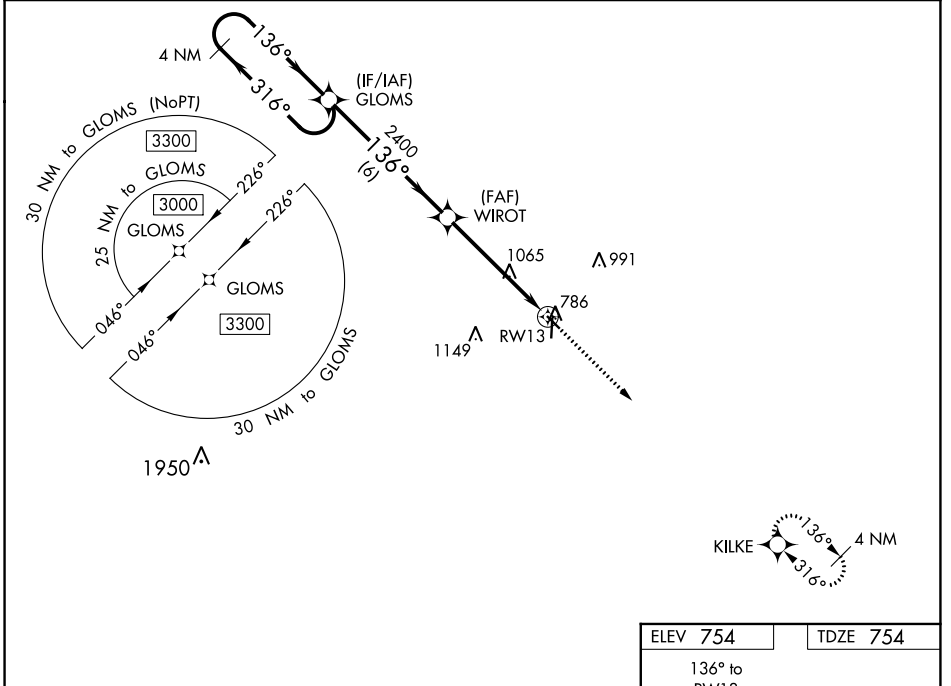

| CATEGORY     | A                    | B                    | C | D  |
|--------------|----------------------|----------------------|---|----|
| LPV DA       | 1004-1 250 (300-1)   |                      |   | NA |
| LNAV/VNAV DA | 1220-1½ 466 (500-1½) |                      |   | NA |
| LNAV MDA     | 1320-1 566 (600-1)   | 1320-1½ 566 (600-1½) |   | NA |
| CIRCLING     | 1320-1 566 (600-1)   | 1500-2¼ 746 (800-2¼) |   | NA |

NC-3, 28 NOV 2024 to 26 DEC 2024

NC-3, 28 NOV 2024 to 26 DEC 2024