



WAAS CH 45722 W11A	APP CRS 110°	Rwy Idg 4876 TDZE 854 Apt Elev 871
--	------------------------	---

RNAV (GPS) RWY 11

LEBANON SPRINGFIELD-GEORGE HOERTER FLD (6I2)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. ▲ When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility 1/4 mile and LNAV Cats C/D 3/8 mile. Baro-VNAV NA when using Danville altimeter setting.	MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.
---	---

AWOS-3P 119.725	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

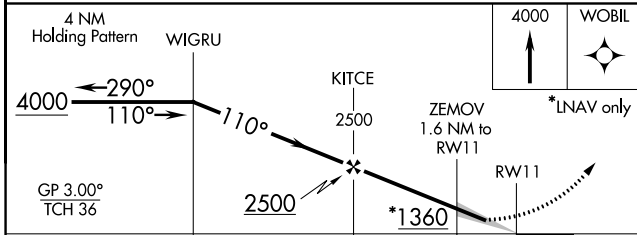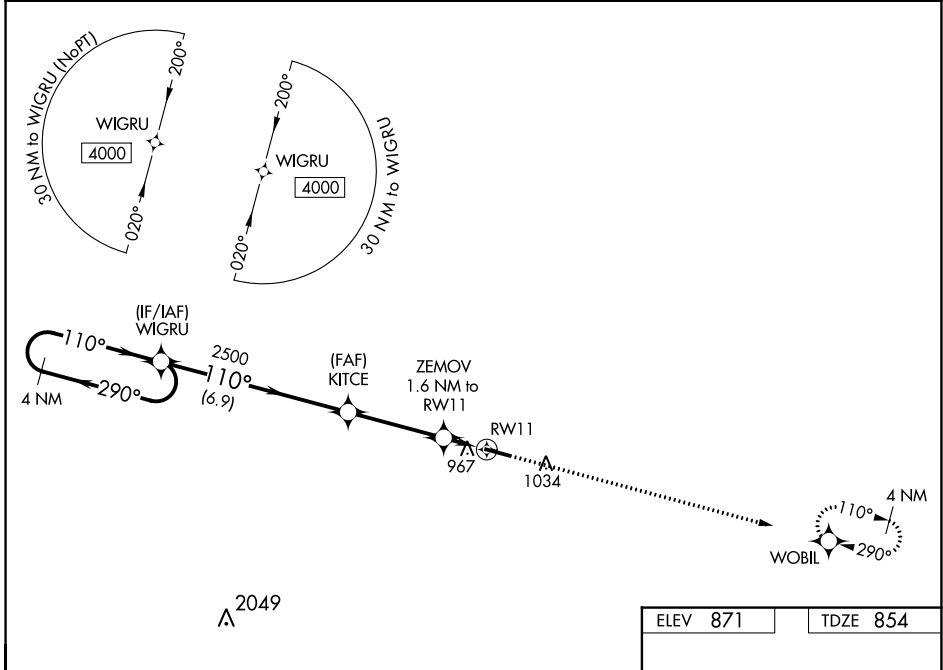

ELEV 871	TDZE 854
4000	WOBIL
GP 3.00° TCH 36	*LNAV only
110°	1.0% UP →
5001 X 75	

CATEGORY	A	B	C	D
LPV DA		1104-1	250 (300-1)	
LNAV/VNAV DA		1159-1 1/8	305 (300-1 1/8)	
LNAV MDA		1220-1	366 (400-1)	
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1 1/2 489 (500-1 1/2)	1500-2 629 (700-2)

RNAV (GPS) RWY 11

SE-1, 28 NOV 2024 to 26 DEC 2024

SE-1, 28 NOV 2024 to 26 DEC 2024