RNAV (GPS) Y RWY 25

DENVER INTL (DEN)

WAAS	APP CRS	Rwy Idg	12000
CH 40428	263°	TDZE	5355
W25A		Apt Elev	5434

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 46°C (116°F). Simultaneous approach authorized with Rwy 26. DME/DME RNP-0.3 NA. Use of FD or AP providing track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to RVR 4500. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 10000 direct GIVTE and on track 315° to HYGEN and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON	CLNC DEL	CPDLC
125.6 379.9 (ARR) 134.025 (DEP)	119.3 307.3 (N) 120.35 379.3 (S)	128.75 273.55	121.35 379.175 (W) 121.85 377.1 (E)	118.75	

MISSED APCH FIX

HYGEN 129° 7 NM 309°

RADAR REQUIRED

315° (23.3)

GIVTE

5539

RW25

(FAF) GASTI

7000 263° (10)

(IF) ETHAL

MSA RW25 25 NM 9800

6147

ELEV 5434 D TDZE 5355



HIRL all Rwys
TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

10000	GIVTE	tr 315°	HYGEN

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 83).

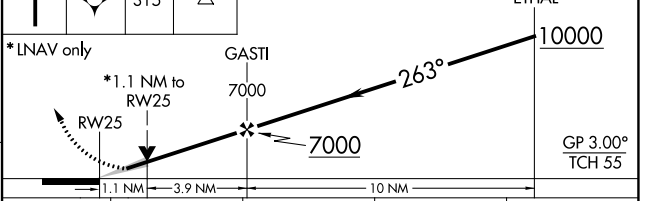

CATEGORY	A	B	C	D
LPV DA#	5555/24 200 (200-½)			
LNAV/VNAV DA	5700/30 345 (300-⅝)			
LNAV MDA	5800/24 445 (400-½)		5800/45 445 (400-⅞)	

SW-1, 28 NOV 2024 to 26 DEC 2024

SW-1, 28 NOV 2024 to 26 DEC 2024