

APP CRS Rwy Idg **12020**
 042° TDZE **3923**
 Apt Elev **3962**

RNAV (RNP) Y RWY 4


EL PASO INTL (ELP)

RNP AR APCH. RF required.



▼ For uncompensated Baro-VNAV systems, procedure NA below -22°C or above 54°C.

MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.

| | | | | |
|------------------------------|---|---------------------------------------|-------------------------------|--------------------------------|
| D-ATIS 120.0 254.3 | EL PASO APP CON 124.25 298.85 | EL PASO TOWER 118.3 239.275 | GND CON 121.9 348.6 | CLNC DEL 125.0 379.1 |
|------------------------------|---|---------------------------------------|-------------------------------|--------------------------------|

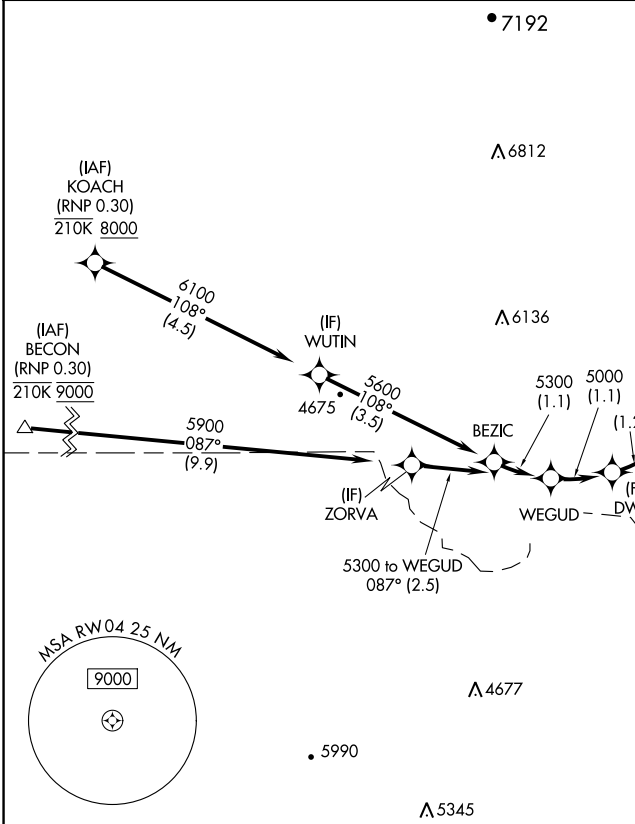

ELEV 3962 TDZE 3923

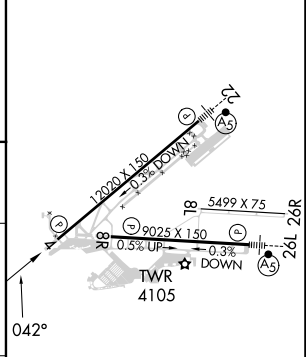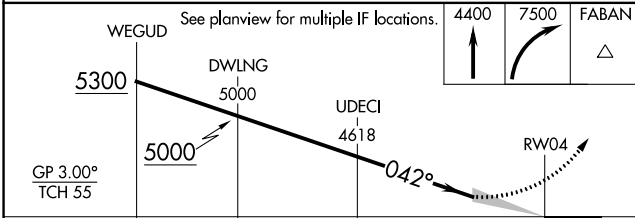

| CATEGORY | A | B | C | D |
|-------------|---|---------|--------------|---|
| RNP 0.20 DA | | 4271/55 | 348 (400-1) | |
| RNP 0.30 DA | | 4340/60 | 417 (400-1½) | |

AUTHORIZATION REQUIRED

MIRL Rwy 8L-26R
 REIL Rwy 4 and 8R
 HIRL Rwy 4-22 and 8R-26L