GLADZ FOUR DEPARTURE (RNAV) Departure Routes

(GLADZ4.GLADZ) 31OCT24

MIAMI, FLORIDA
MIAMI INTL (MIA)

MIAMI DEP CON
125.5 354.1 (Departing West)
119.45 290.325 (Departing East)
D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(Rwys 8L/R, 12, 26L/R) 121.8 348.6
(Rwys 9, 27, 30) 127.5 348.6
MIAMI TOWER
118.3 256.9

TOP ALTITUDE: 5000

RNAV-1 DME/DME/IRU or GPS.
RADAR required for NON-GPS equipped aircraft.
RADAR required.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
NOTE: SHAQQ and BAGGS transitions ATC assigned except aircraft departing MIA.

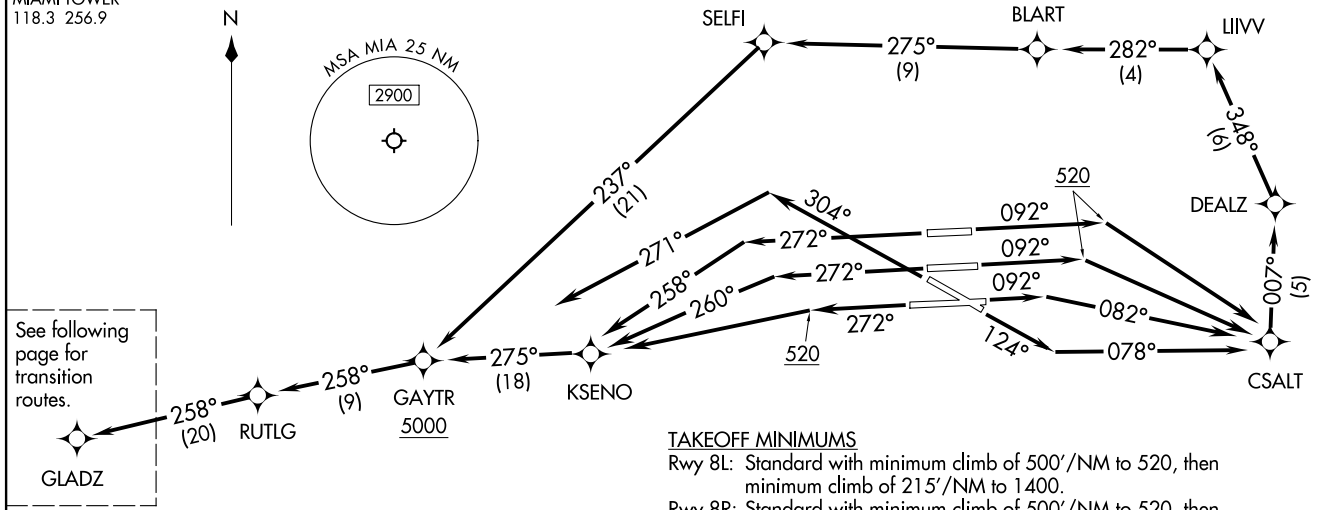

TAKEOFF MINIMUMS
Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215'/NM to 1400.
Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235'/NM to 1400.
Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240'/NM to 1400.
Rwy 12: Standard with minimum climb of 500'/NM to 520, then minimum climb of 230'/NM to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

(GLADZ4.GLADZ) 24305
GLADZ FOUR DEPARTURE (RNAV) Departure Routes

AL-257 (FAA)

MIAMI INTL (MIA)
MIAMI, FLORIDA