

LOC/DME I-LDZ 108.9 Chan 26	APP CRS 123°	Rwy Idg TDZE Apt Elev	8956 541 618
--	------------------------	-----------------------------	---


ILS or LOC RWY 12L

ST LOUIS LAMBERT INTL (STL)


Disregard OM indications. For inop ALS, increase S-ILS 12L Cat E visibility to RVR 4000 and S-LOC 12L Cat E visibility to 1 1/2 SM. Simultaneous approach authorized with Rwy 11. Simultaneous approach authorized with Rwy 12R requires use of vertical guidance; maintain last altitude until established on the glideslope.

ALSF-2
MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct TOY VORTAC and hold.


D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	--	---	--------------------------------	-------

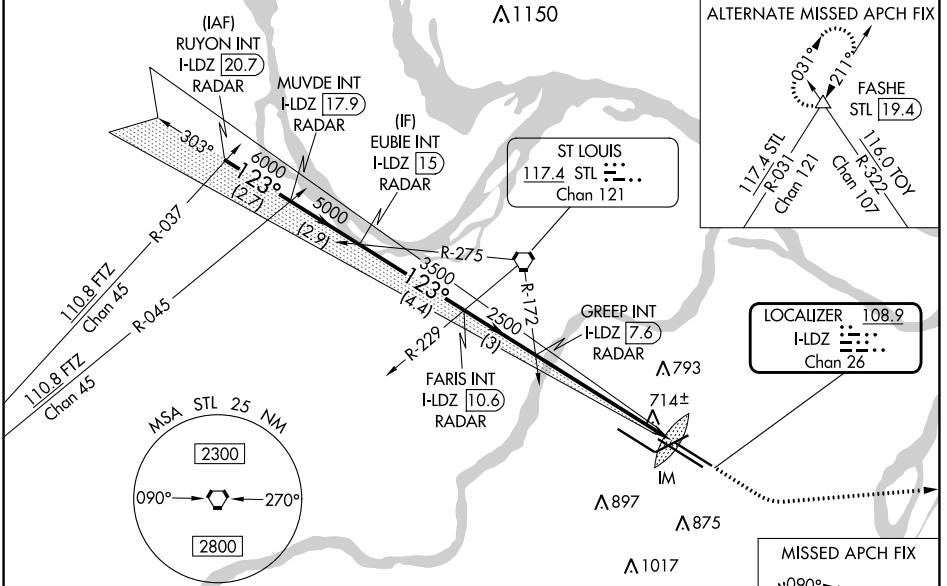

ELEV 618	D TDZE 541
----------	------------



RADAR and DME REQUIRED

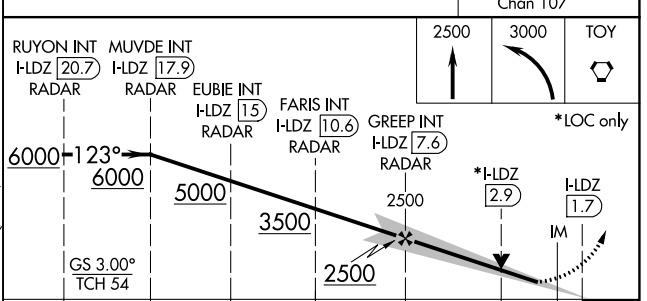

CATEGORY	A	B	C	D	E
S-ILS 12L	741/18		200 (200-1/2)	741/24 200 (200-1/2)	
S-LOC 12L	980/24	439 (400-1/2)	980/40 439 (400-3/4)	980/50	439 (400-1)

NC-3, 26 DEC 2024 to 23 JAN 2025

NC-3, 26 DEC 2024 to 23 JAN 2025