

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 90432 W31A | APP CRS 306° | Rwy Idg TDZE Apt Elev | 5601 583 595 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 31

SAN MARCOS RGNL (HYI)



▼ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile and LNAV Cat C/D/E and Circling Cat C/D visibility 1/4. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 3500 direct ORALE and hold.

| | | | | | |
|--------------------------|---------------------------------------|---|---------------------------|----------------------------|--|
| ATIS ★ 120.825 | AUSTIN APP CON 119.0 370.85 | SAN MARCOS TOWER★ 126.825 (CTAF) 📻 | GND CON 120.125 | CLNC DEL 120.125 | CLNC DEL 121.35 (when twr closed) |
|--------------------------|---------------------------------------|---|---------------------------|----------------------------|--|

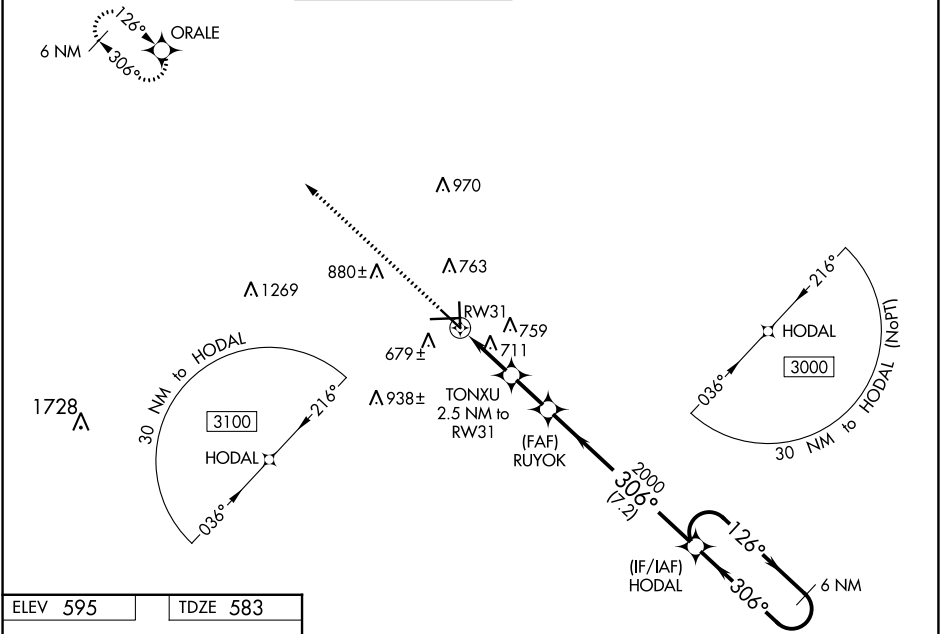

| | |
|-----------------|-----------------|
| ELEV 595 | TDZE 583 |
|-----------------|-----------------|

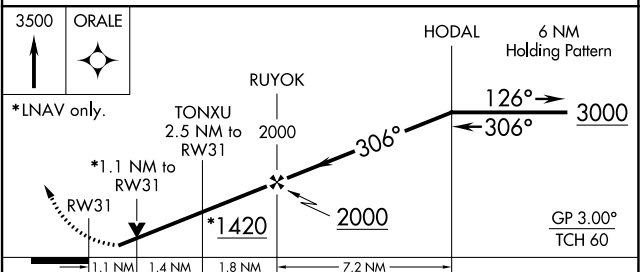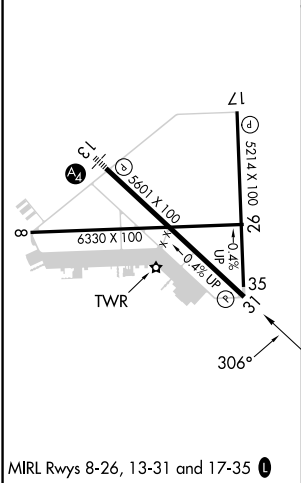

| CATEGORY | A | B | C | D | E |
|--------------|-------------------|-------------|---------------------------|-----------------|-----------------|
| LPV DA | 860-7/8 | | 277 (300-7/8) | | |
| LNAV/VNAV DA | 906-1 | | 323 (400-1) | | |
| LNAV MDA | 980-1 397 (400-1) | | 980-1 1/8 397 (400-1 1/8) | | |
| CIRCLING | 1080-1 | 1120-1 | 1240-1 3/4 | 1320-2 1/4 | 1340-2 3/4 |
| | 485 (500-1) | 525 (600-1) | 645 (700-1 1/4) | 725 (800-2 1/4) | 745 (800-2 3/4) |