RNAV (RNP) Z RWY 1

JACKSON HOLE (JAC)

APP CRS	Rwy Idg	6300
006°	TDZE	6431
	Apt Elev	6451

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C.
Inop table does not apply to RNP 0.11* all Cats visibility.
For inop ALS, increase RNP 0.30* all Cats visibility to ⅞ SM.
Missed approach requires RNP less than 1.0.

MALS

MISSED APPROACH: Climb to 14000 on track 007° to UBEVE and track 007° to QUIRT and track 088° to DNW VOR/DME and hold, continue climb-in-hold to 14000.
* Missed approach requires minimum climb of 330 feet per NM to 8200; if unable to meet climb gradient, see RNAV (RNP) Y RWY 1.

D-ATIS	SALT LAKE CENTER	JACKSON TOWER*	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF) L	124.55	122.95

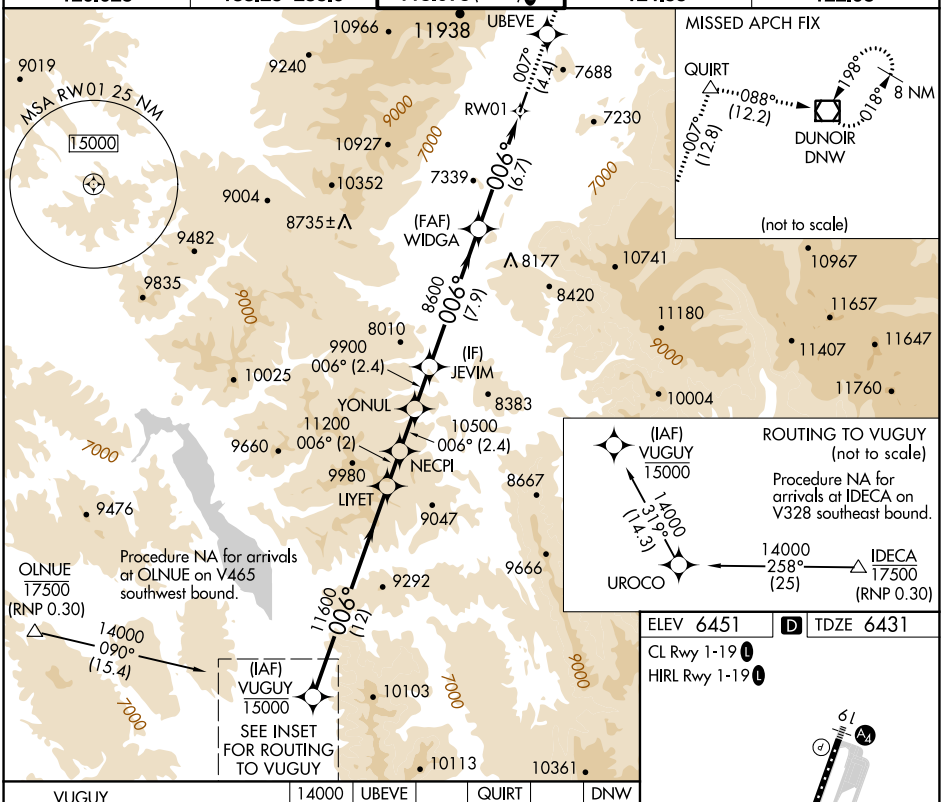

MISSED APCH FIX

(not to scale)

ROUTING TO VUGUY (not to scale)

Procedure NA for arrivals at IDECA on V328 southeast bound.

ELEV 6451 D TDZE 6431
CL Rwy 1-19 L
HIRL Rwy 1-19 L

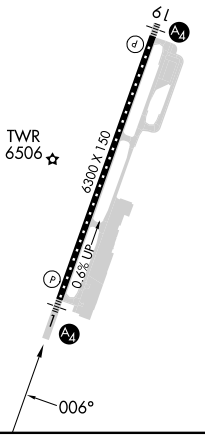

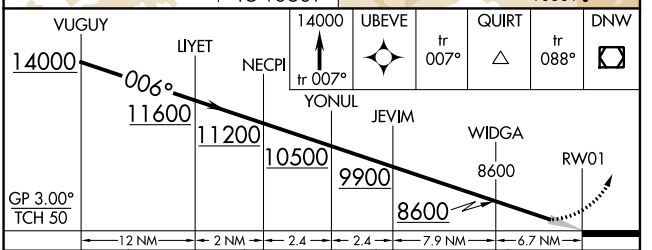

14000 tr 007°	UBEVE	tr 007°	QUIRT	tr 088°	DNW

CATEGORY	A	B	C	D
RNP 0.11 DA*	6690-¾	259 (300-¾)		
RNP 0.30 DA*	6743-¾	312 (300-¾)		

AUTHORIZATION REQUIRED

NW-1, 26 DEC 2024 to 23 JAN 2025
NW-1, 26 DEC 2024 to 23 JAN 2025