

WAAS CH 93808 W35A	APP CRS 355°	Rwy Idg 7201 TDZE 1008 Apt Elev 1009
--	------------------------	---

RNAV (GPS) RWY 35


PONCA CITY RGNL (PNC)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Winfield-Arkansas City altimeter setting and increase LPV DA to 1377 feet, LNAV/VNAV DA to 1560 feet and all MDA 100 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cats C and D visibility ¼ SM. Baro-VNAV NA when using Winfield-Arkansas City altimeter setting. Visibility reduction by helicopters NA.

ODALS

MISSED APPROACH:
Climb to 2800 direct TOMHO and hold.

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) ①
-------------------------------	---	--

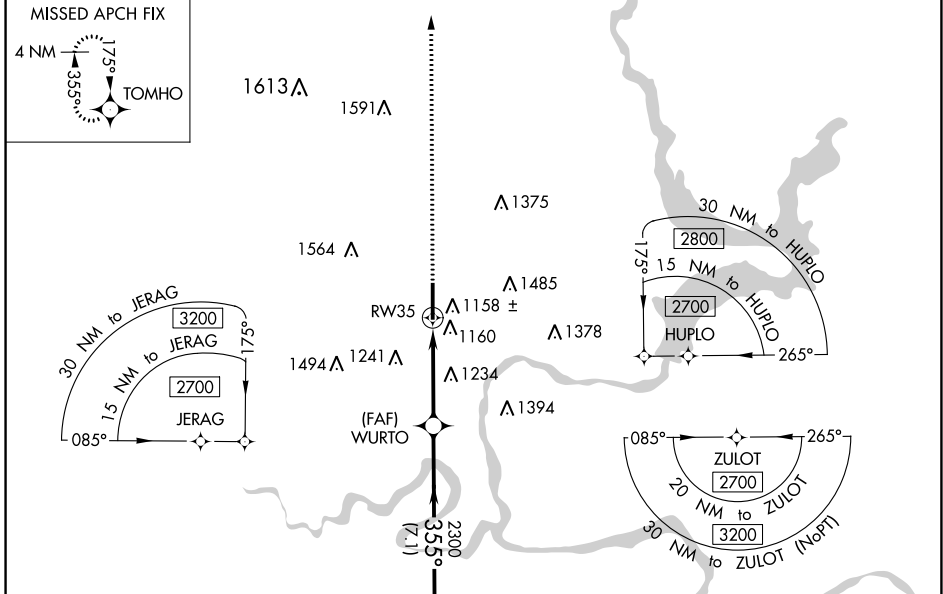

ELEV 1009	TDZE 1008
HIRL Rwy 17-35 ①	



4 NM Holding Pattern	ZULOT	2800	TOMHO
2700	355°	355°	RW35
GP 3.00°	TCH 45	2300	7.1 NM
			3.9 NM

CATEGORY	A	B	C	D
LPV DA		1295-1	287 (300-1)	
LNAV/VNAV DA		1478-1¾	470 (500-1¾)	
LNAV MDA	1540-1	532 (600-1)	1540-1½ 532 (600-1½)	1540-1¾ 532 (600-1¾)
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2½ 791 (800-2½)	1880-2¾ 871 (900-2¾)

SC-1, 26 DEC 2024 to 23 JAN 2025

SC-1, 26 DEC 2024 to 23 JAN 2025