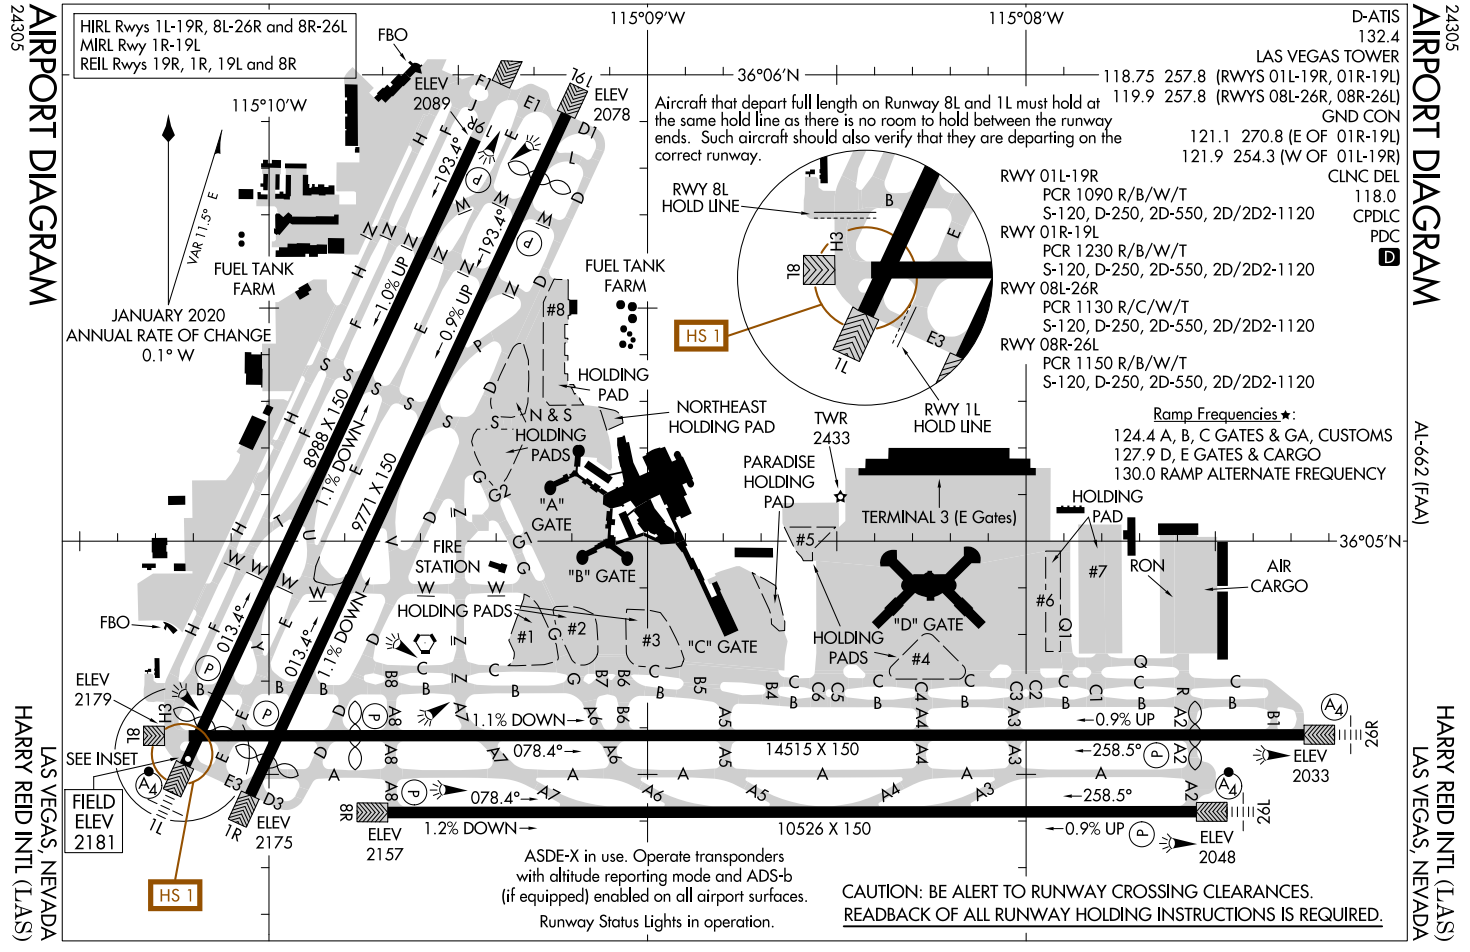
AIRPORT DIAGRAM
24305
HARRY REID INTL (LAS)
LAS VEGAS, NEVADA
HIRL Rwys 1L-19R, 8L-26R and 8R-26L
MIRL Rwy 1R-19L
REIL Rwys 19R, 1R, 19L and 8R
115°10'W
115°09'W
115°08'W
36°06'N
36°05'N
FBO
ELEV 2089
ELEV 2078
VAR 11.5° E
JANUARY 2020
ANNUAL RATE OF CHANGE
0.1° W
FUEL TANK FARM
FUEL TANK FARM
1.0% UP
0.9% UP
1.1% DOWN
8988 X 150
9771 X 150
193.4°
013.4°
078.4°
258.5°
HOLDING PAD
NORTHEAST HOLDING PAD
N & S HOLDING PADS
"A" GATE
"B" GATE
"C" GATE
"D" GATE
FIRE STATION
HOLDING PADS
PARADISE HOLDING PAD
TWR 2433
TERMINAL 3 (E Gates)
HOLDING PAD
RON
AIR CARGO
HOLDING PADS
ELEV 2179
SEE INSET
FIELD ELEV 2181
ELEV 2175
ELEV 2157
ELEV 2033
ELEV 2048
14515 X 150
10526 X 150
1.2% DOWN
HS 1
RWY 8L HOLD LINE
RWY 1L HOLD LINE
Aircraft that depart full length on Runway 8L and 1L must hold at the same hold line as there is no room to hold between the runway ends. Such aircraft should also verify that they are departing on the correct runway.
D-ATIS
132.4
LAS VEGAS TOWER
118.75 257.8 (RWYS 01L-19R, 01R-19L)
119.9 257.8 (RWYS 08L-26R, 08R-26L)
GND CON
121.1 270.8 (E OF 01R-19L)
121.9 254.3 (W OF 01L-19R)
CLNC DEL 118.0
CPDLC
PDC
D
RWY 01L-19R
PCR 1090 R/B/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
RWY 01R-19L
PCR 1230 R/B/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
RWY 08L-26R
PCR 1130 R/C/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
RWY 08R-26L
PCR 1150 R/B/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
Ramp Frequencies★:
124.4 A, B, C GATES & GA, CUSTOMS
127.9 D, E GATES & CARGO
130.0 RAMP ALTERNATE FREQUENCY
ASDE-X in use. Operate transponders with altitude reporting mode and ADS-b (if equipped) enabled on all airport surfaces.
Runway Status Lights in operation.
CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.
AL-662 (FAA)