WAAS CH 86720 W13B	APP CRS 132°	Rwy Idg 5098 / TDZE 151 / Apt Elev 151

RNAV (GPS) Y RWY 13

HATTIESBURG BOBBY L CHAIN MUNI (HBG)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hattiesburg/Laurel Rgnl altimeter setting and increase all DA 51 feet and all MDA 60 feet. Increase LPV all Cats and LNAV Cat C/D visibility ⅛ mile and LNAV/VNAV all Cats and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Hattiesburg/Laurel Rgnl altimeter setting.

MISSED APPROACH: Climbing right turn to 2500 direct HILGA and hold.

ASOS	HOUSTON CENTER	UNICOM
135.425	126.8 327.8	122.8 (CTAF) L

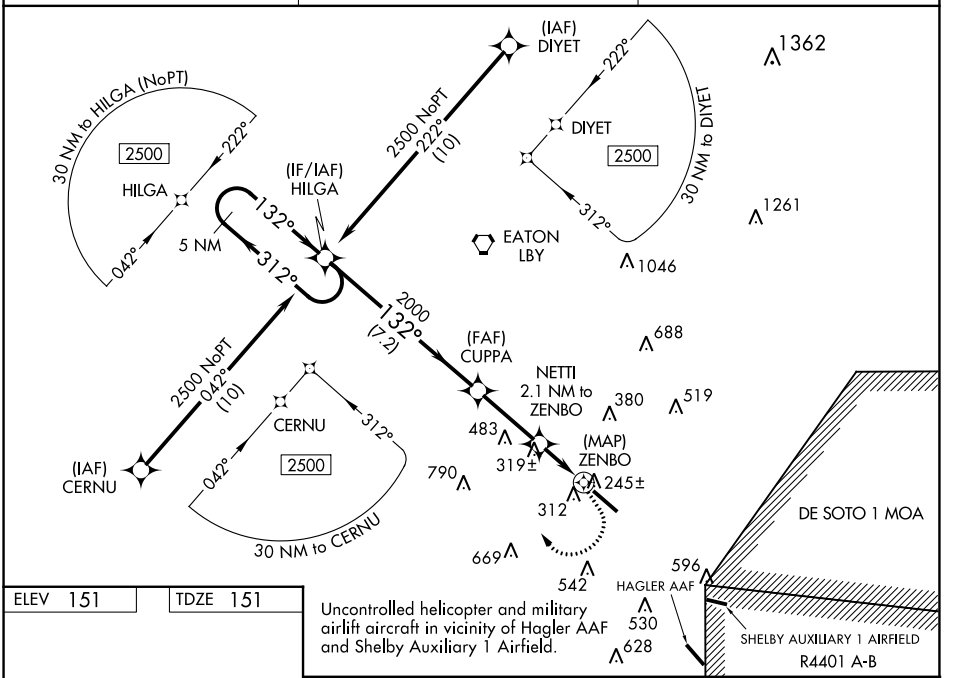

ELEV 151	TDZE 151



REIL Rwy 13 L
MIRL Rwy 13-31 L

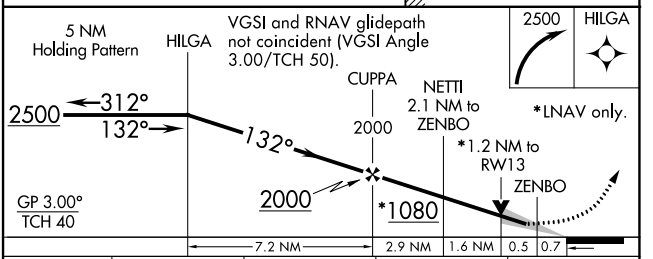

CATEGORY	A	B	C	D
LPV DA	442-1	291 (300-1)		
LNAV/VNAV DA	523-1¼	372 (400-1¼)		
LNAV MDA	580-1	429 (500-1)	580-1¼	429 (500-1¼)
CIRCLING	680-1	529 (600-1)	720-1	569 (600-1)	860-2	709 (800-2)	900-2½	749 (800-2½)

SC-4, 26 DEC 2024 to 23 JAN 2025
SC-4, 26 DEC 2024 to 23 JAN 2025