


| | | | |
|-------------------------|------------------------|-----------------------------|---|
| LOC HBE 110.9 | APP CRS 236° | Rwy Idg TDZE Apt Elev | 7372 1145 1199 |
|-------------------------|------------------------|-----------------------------|---|

ILS or LOC RWY 24

ARNOLD PALMER RGNL (LBE)

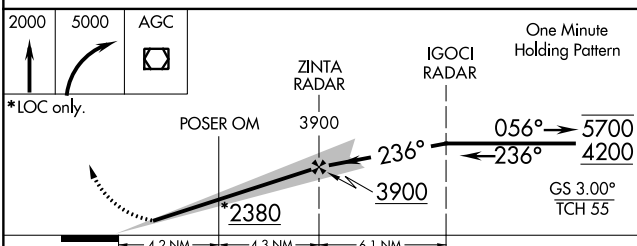
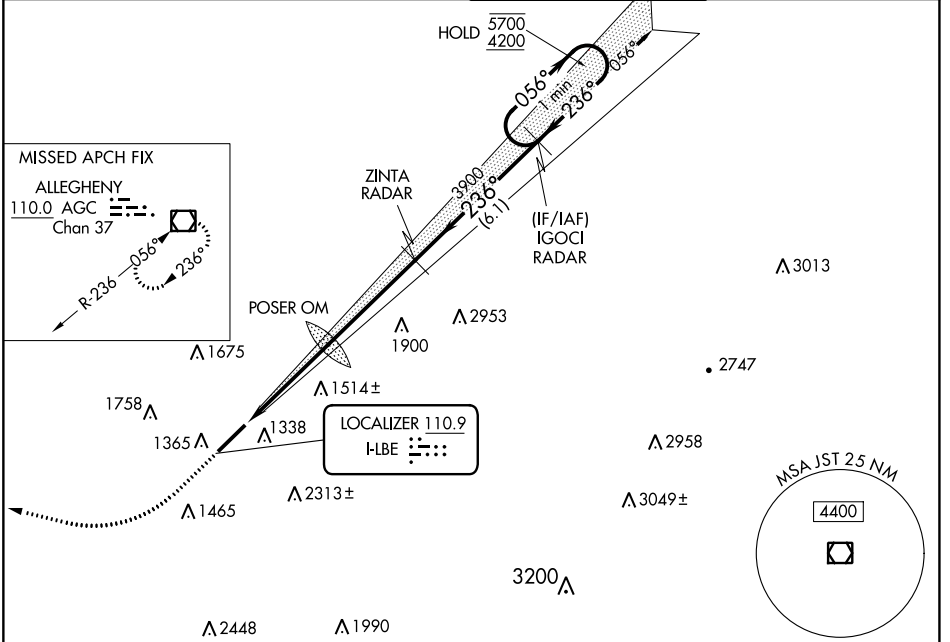
RNAV 1-GPS or RADAR required for procedure entry.
From IGOCI: RNAV 1-GPS required.
RADAR required.

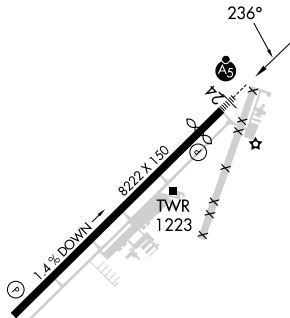


⚠ Circling NA SE of Rwy 6-24. Inop table does not apply to S-LOC 24 Cats C/D.
⚠ For inop ALS, increase POSER OM minimums S-LOC 24 Cats C/D visibility to 1 3/4 SM.

MALSR 

MISSED APPROACH: Climb to 2000 then climbing right turn to 5000 direct AGC VOR/DME and hold.

| | | | |
|------------------------|---|---------------------------------------|-------------------------|
| ATIS 118.375 | JOHNSTOWN APP CON * 121.2 299.2 | PALMER TOWER * 125.0 (CTAF) | GND CON 121.8 |
|------------------------|---|---------------------------------------|-------------------------|



| | |
|---|--------------------------|
| ELEV 1199 | TDZE 1145 |
|  | |
| REIL Rwy 6  | |
| HIRL Rwy 6-24  | |
| FAF to MAP 8.5 NM | |
| Knots | 60 90 120 150 180 |
| Min:Sec | 8:30 5:40 4:15 3:24 2:50 |

| CATEGORY | A | B | C | D |
|-------------------|---------------------------------|---------------------------------|-------------------------------|-------------------------------|
| S-ILS 24 | 1345-1/2 200 (200-1/2) | | | |
| S-LOC 24 | 2380-3/4 1235 (1200-3/4) | 2380-1 1235 (1200-1) | 2380-3 | 1235 (1200-3) |
| C CIRCLING | 2380-1 1/4 1181 (1200-1 1/4) | 2380-1 1/2 1181 (1200-1 1/2) | 2380-3 | 1181 (1200-3) |
| POSER OM MINIMUMS | | | | |
| S-LOC 24 | 1760-1/2 | 615 (600-1/2) | 1760-1 3/8 | 615 (600-1 3/8) |
| C CIRCLING | 1760-1 561 (600-1) | 1780-1 581 (600-1) | 2060-2 1/2 861 (900-2 1/2) | 2060-2 3/4 861 (900-2 3/4) |

NE-4, 26 DEC 2024 to 23 JAN 2025

NE-4, 26 DEC 2024 to 23 JAN 2025