

APP CRS	Rwy Idg	7002
107°	TDZE	413
	Apt Elev	413

RNAV (GPS) RWY 12R


ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS



▼ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase LNAV Cats B/C/D and Circling Cat C visibility $\frac{1}{4}$ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below $\frac{1}{4}$ SM NA.

MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.

ATIS	ST LOUIS APP CON	DOWNTOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
121.45	123.7 371.875	119.925 (CTAF) 0 379.3	121.8	118.275	121.8 (When twr closed)	122.95

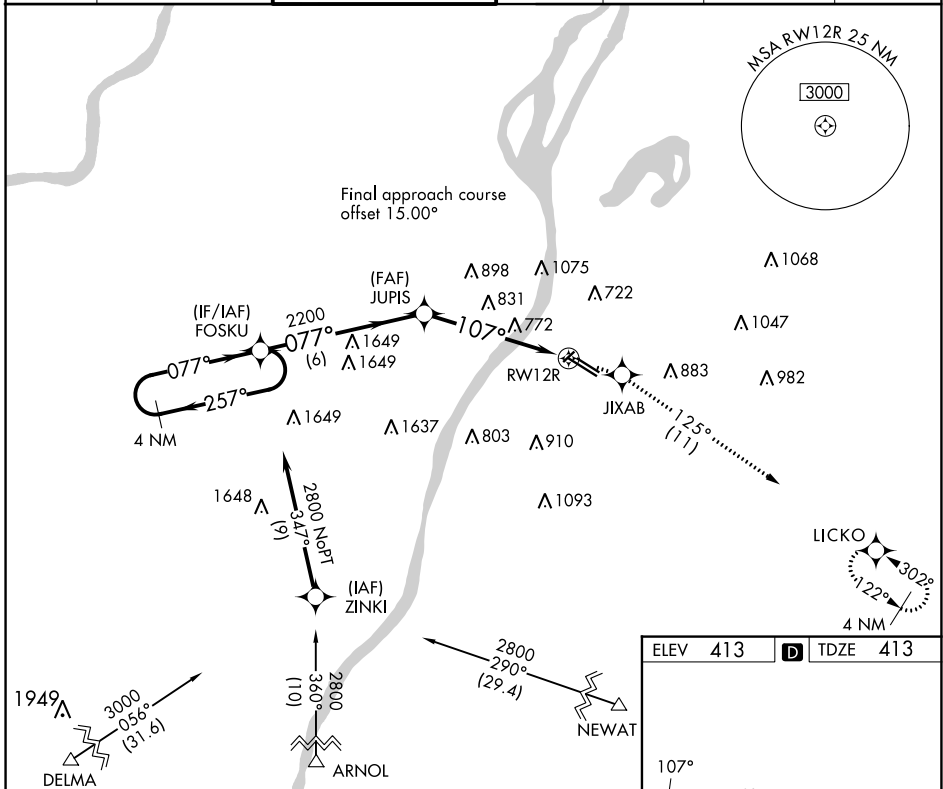

ELEV	413	D	TDZE	413
------	-----	----------	------	-----

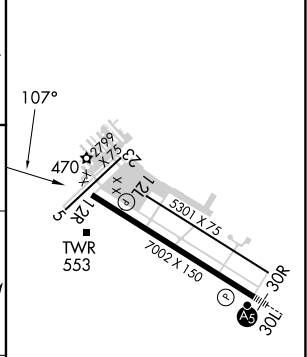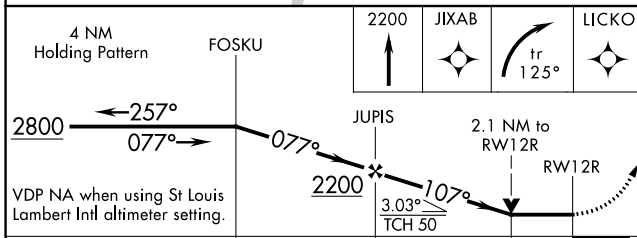

CATEGORY	A	B	C	D
LNAV MDA	1140-1 727 (800-1)		1140-2 727 (800-2)	1140-2 1/4 727 (800-2 1/4)
CIRCLING	1140-1 727 (800-1)		1240-2 1/2 827 (900-2 1/2)	1380-3 967 (1000-3)

HIRL Rwy 12R-30L
REIL Rws 12L and 12R
REIL Rwy 30R
MIRL Rws 5-23 and 12L-30R

EC-3, 26 DEC 2024 to 23 JAN 2025

EC-3, 26 DEC 2024 to 23 JAN 2025