

WAAS CH 87130 W35A	APP CRS 353°	Rwy Idg 5501 TDZE 580 Apt Elev 592
--	------------------------	---


RNAV (GPS) RWY 35
MC GREGOR EXEC (PWG)

RNP APCH - GPS

T Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 861 feet; increase LNAV/VNAV DA to 861 feet; increase all MDAs 40 feet and LNAV visibility Cat B ¼ SM, and Circling visibility Cat B/C ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2500 direct BLDEE and on track 018° to ACT VORTAC and hold.

AWOS-3PT 135.525	WACO APP CON ★ 127.65 352.0	GCO 121.725	UNICOM 123.05 (CTAF) 0
----------------------------	---------------------------------------	-----------------------	----------------------------------

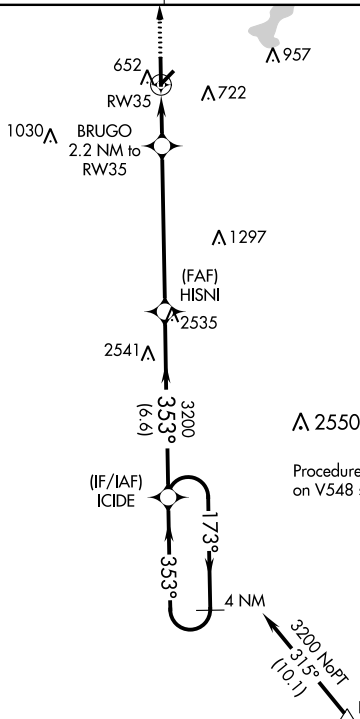

Procedure NA for arrivals at BARBA on V548 southbound.

ELEV 592		TDZE 580
----------	--	----------

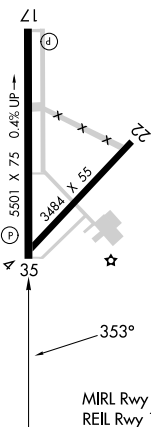[illegible]