

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 86505 W06A | APP CRS 057° | Rwy Idg TDZE Apt Elev | 5000 302 302 |
|--|------------------------|-----------------------------|---|




RNAV (GPS) RWY 6

WOODWARD FLD (CDN)

Baro-VNAV NA when using Columbia altimeter setting. When local altimeter setting not received, use Columbia altimeter setting and increase all DAs/MDAs 100 feet; increase LNAV and Circling visibility Cats C/D ¼ SM. For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3000 direct IBAYE and hold.

| | | |
|----------------------------|--------------------------------------|---------------------------------|
| AWOS-3PT 119.975 | SHAW APP CON * 125.4 318.1 | UNICOM 123.0 (CTAF) 0 |
|----------------------------|--------------------------------------|---------------------------------|

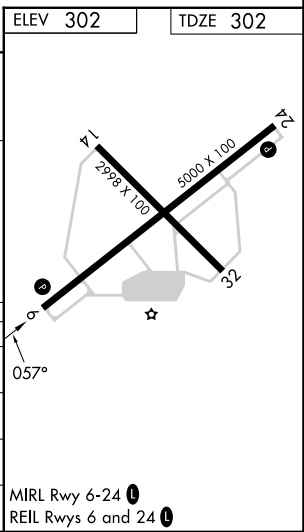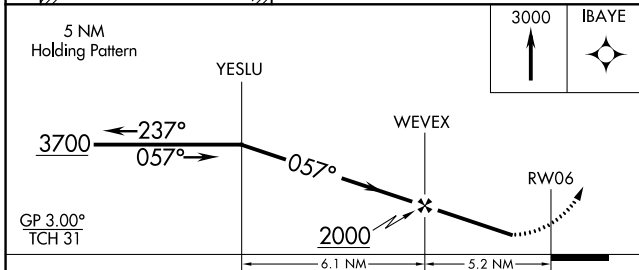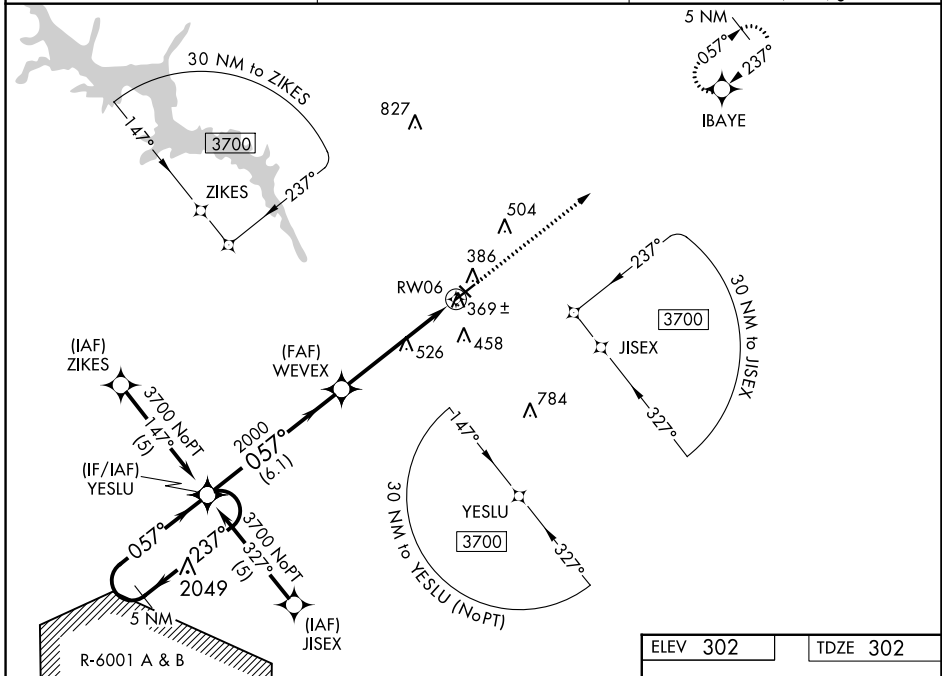

| CATEGORY | A | B | C | D |
|--------------|---------------------|---------------------|---------------------|---------------------|
| LPV DA | 582-1 280 (300-1) | | | |
| LNAV/VNAV DA | 713-1½ 411 (500-1½) | | | |
| LNAV MDA | 780-1 478 (500-1) | 780-1¼ 478 (500-1¼) | 780-1½ 478 (500-1½) | 780-1½ 478 (500-1½) |
| CIRCLING | 840-1 538 (600-1) | 840-1½ 538 (600-1½) | 900-2 598 (600-2) | 900-2 598 (600-2) |

SE-2, 26 DEC 2024 to 23 JAN 2025

SE-2, 26 DEC 2024 to 23 JAN 2025