

| | | |
|--|------------------------|---|
| WAAS CH 56229 W35A | APP CRS 354° | Rwy Idg 7003 TDZE 1528 Apt Elev 1533 |
|--|------------------------|---|

RNAV (GPS) RWY 35

NEWTON-CITY-COUNTY (E W K)



RNP APCH

When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1878 feet and visibility ¼ SM; increase all MDAs 100 feet and visibility LNAV Cat C ¾ SM and LNAV Cat D ½ SM. VDP NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. Circling Rwy 8, 26 NA at night.

MISSED APPROACH:
Climb to 3200 direct
GWINN and hold.



| | | | |
|----------------------------|---------------------------------------|---------------------------|---------------------------------|
| AWOS-3PT 123.875 | WICHITA APP CON 125.5 306.2 | CLNC DEL 126.55 | UNICOM 123.0 (CTAF) 0 |
|----------------------------|---------------------------------------|---------------------------|---------------------------------|

MISSED APCH FIX

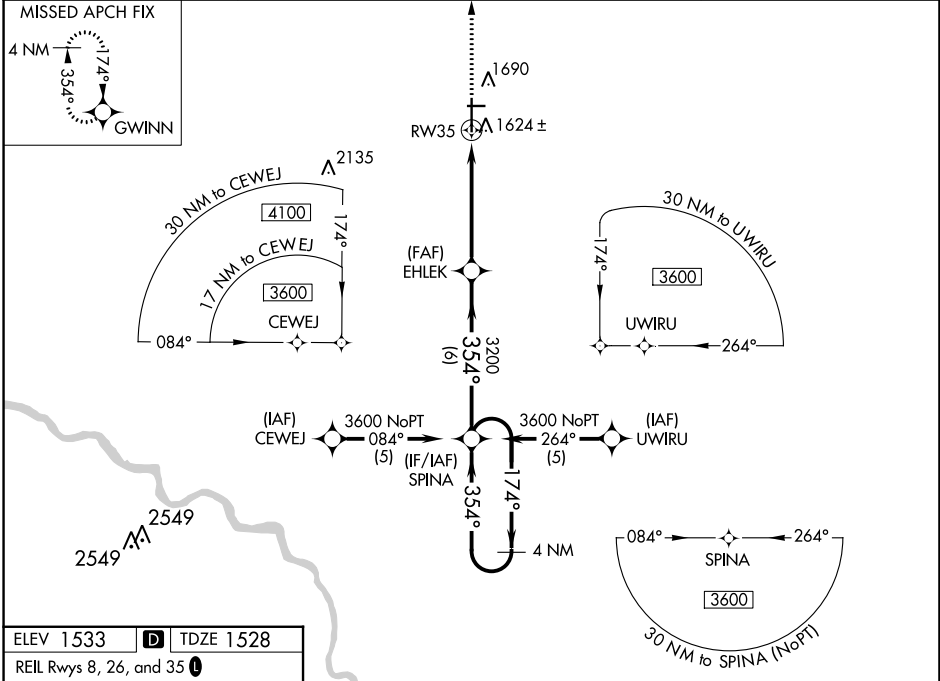

| | | |
|-----------|----------|-----------|
| ELEV 1533 | D | TDZE 1528 |
|-----------|----------|-----------|

- REIL Rws 8, 26, and 35
- HIRL Rwy 17-35
- MIRL Rwy 8-26

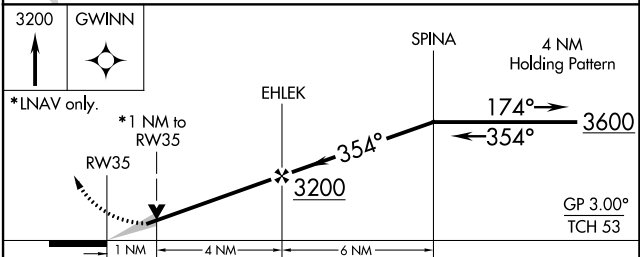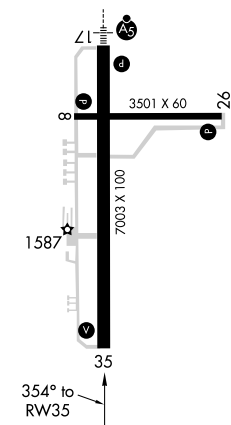

| CATEGORY | A | B | C | D |
|--------------|--------------------|---|---|-------------------------|
| LPV DA | 1778-¾ 250 (300-¾) | | | |
| LNAV/VNAV DA | NA | | | |
| LNAV MDA | 1880-1 352 (400-1) | | | 1880-1½ 352 (400-1½) |
| CIRCLING | 2000-1 467 (500-1) | | 2000-1½ 467 (500-1½) 2100-2 567 (600-2) | |