
23 JAN 2025

2

26 DEC 2024

SE-3,

LIFRR TWO DEPARTURE (RNAV)

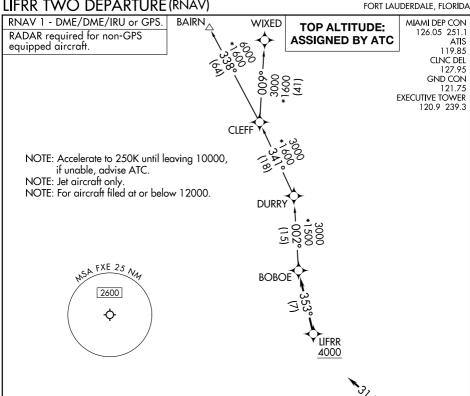

TAKEOFF MINIMUMS Rwys 9, 13, 31: Standard.

Rwy 27: Standard with minimum climb of 500'/NM to 520.

NOTE: Chart not to scale.

v

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climb on heading 091° or as assigned by ATC , thence. . . TAKEOFF RUNWAY 13: Climb on heading 136° or as assigned by ATC , thence. . . TAKEOFF RUNWAY 27: Climb on heading 271° or as assigned by ATC, thence. . . TAKEOFF RUNWAY 31: Climb on heading 316° or as assigned by ATC, thence. . .

. . . for RADAR vector to cross LIFRR at or above 4000, then on track 353° to BOBOE, then on assigned transition, maintain ATC assigned altitude, expect clearance to filed altitude within 10 minutes after departure.

BAIRN TRANSITION (LIFRR2.BAIRN) WIXED TRANSITION (LIFRR2.WIXED)