

WAAS CH 93901 W36A	APP CRS 001°	Rwy Idg 6503 TDZE 296 Apt Elev 298
--	------------------------	---


RNAV (GPS) RWY 36

HATTIESBURG/LAUREL RGNL (PIB)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Hattiesburg Bobby L Chain Muni altimeter setting: increase LPV DA to 597 feet and LNAV/VNAV DA to 676; increase all MDA 60 feet and visibility LNAV Cat C/D and Circling Cat C/D ¼ SM. Baro-VNAV NA when using Hattiesburg Bobby L Chain Muni altimeter setting.

MISSED APPROACH:
Climb to 2100 direct SULYO and hold.



AWOS-3PT 128.325	HOUSTON CENTER 126.8 327.8	UNICOM 123.0 (CTAF) 0
----------------------------	--------------------------------------	---------------------------------

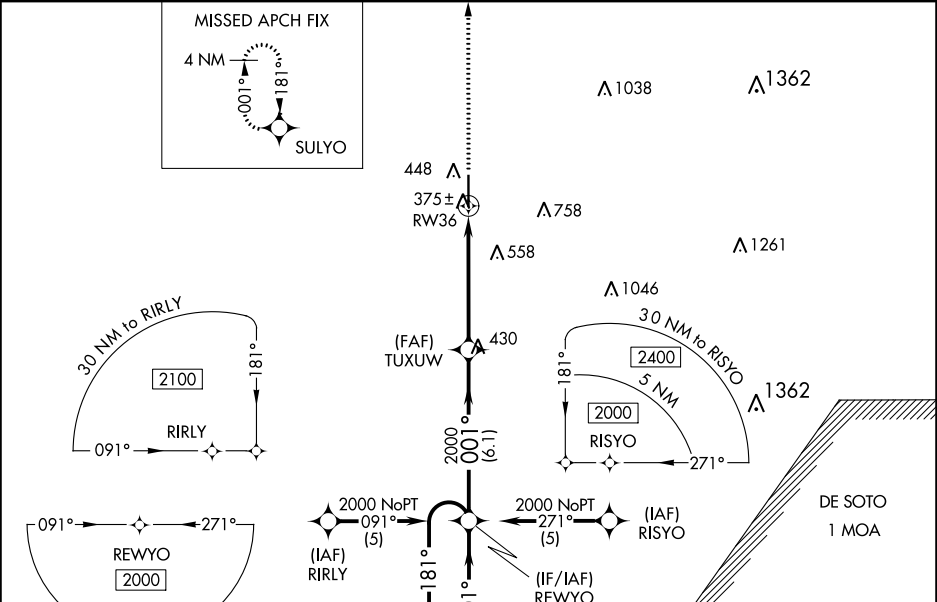

SC-4, 26 DEC 2024 to 23 JAN 2025

SC-4, 26 DEC 2024 to 23 JAN 2025

ELEV 298	D	TDZE 296
----------	----------	----------

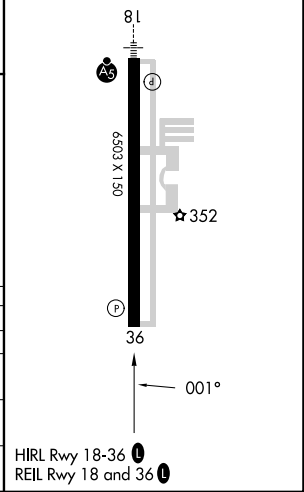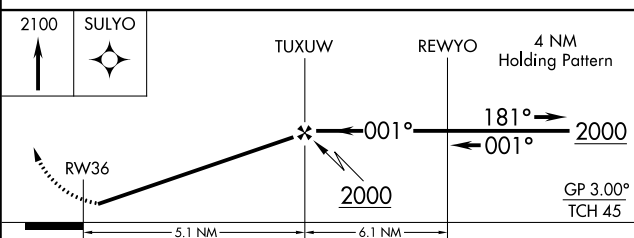

CATEGORY	A	B	C	D
LPV DA	546-1		250 (300-1)	
LNAV/VNAV DA	625-1¼		329 (400-1¼)	
LNAV MDA	680-1		384 (400-1)	
			680-1¼ 384 (400-1¼)	
CIRCLING	760-1 462 (500-1)		1120-2½ 822 (900-2½)	
			1120-2¾ 822 (900-2¾)	