



LOC I-CGW	APP CRS	Rwy Idg	7100
108.3	022°	TDZE	683
		Apt Elev	683

ILS or LOC RWY 2

LOVELL FLD (CHA)

ADF required. RADAR required for procedure entry.			MALSR	MISSED APPROACH: Climb to 3700 direct CGN NDB and hold, continue climb-in-hold to 3700.
Circling Rwy 15, 33 NA at night.				

ATIS	CHATTANOOGA APP CON ★	CHATTANOOGA TOWER ★	GND CON	CLNC DEL	UNICOM
119.85	125.1 379.1	118.3 (CTAF) 257.8	121.7 348.6	120.95 348.6	122.95

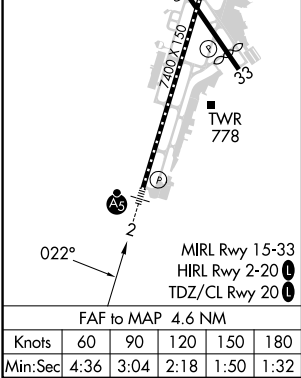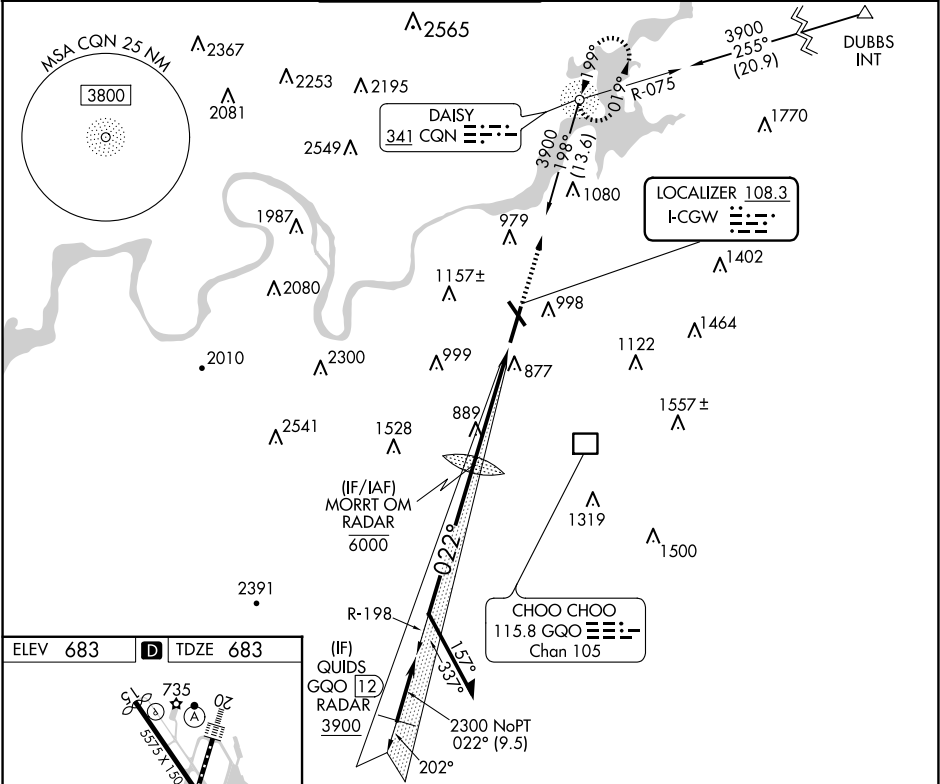

Remain within 10 NM

MORRT OM RADAR

3000

GS 3.00°

TCH 52

202°

022°

2500

2300

2208

6000

3700

CGN

4.6 NM

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

CATEGORY	A	B	C	D
S-ILS 2	883/24 200 (200-½)			
S-LOC 2	1140/24	457 (500-½)	1140/45	457 (500-¾)
CIRCLING	1300-1 617 (700-1)	1340-1 657 (700-1)	1500-2½ 817 (900-2½)	1580-3 897 (900-3)