

LOC/DME I-AHI	APP CRS	Rwy Idg	13500
109.1	352°	TDZE	6118
Chan 28		Apt Elev	6187

ILS or LOC RWY 35R

CITY OF COLORADO SPRINGS MUNI (COS)


▼

▲

RADAR required when R-2601 in use.

MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and on BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON	CLNC DEL
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6	134.45 363.125

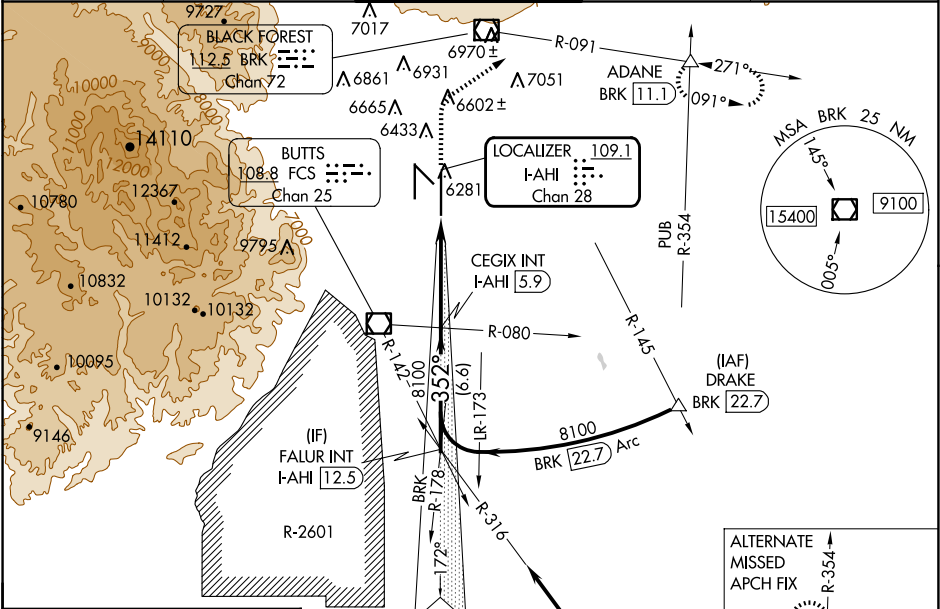

ELEV 6187

D

TDZE 6118

MIRL Rwy 13-31
HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZ/CL Rwys 17L and 35R

Procedure NA for arrival on
PUB VORTAC airway radials
267 CW 354.

IAF
PUEBLO
116.7
Chan 114

ALTERNATE
MISSED
APCH FIX

VGSI and ILS glidepath not coincident
(VGSI Angle 3.00/TCH 71).

FALUR INT
I-AHI 12.5

CEGIX INT
I-AHI 5.9

6700

9000

BRK
R-091

ADANE

8100

8100

352°

GS 3.00°
TCH 55

Use I-AHI DME when
on the localizer course.

I-AHI DME ANTENNA

*I-AHI 0.6

*LOC only

6.6 NM

5.3 NM

0.8 NM

CATEGORY	A	B	C	D
S-ILS 35R	6318/40 200 (200-¾)			
S-LOC 35R	6420/55	302 (300-1)	6420/45	302 (300-¾)
CIRCLING	6740-1	6800-1	7040-2½	7260-3
	553 (600-1)	613 (700-1)	853 (900-2½)	1073 (1100-3)