


WAAS CH 69618 W17A	APP CRS 172°	Rwy Idg TDZE 6187 Apt Elev 6187	13500
--	------------------------	---	--------------

RNAV (GPS) Y RWY 17L

CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For inop MALSR, increase LNAV Cat C/D visibility to 2½ SM.		

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

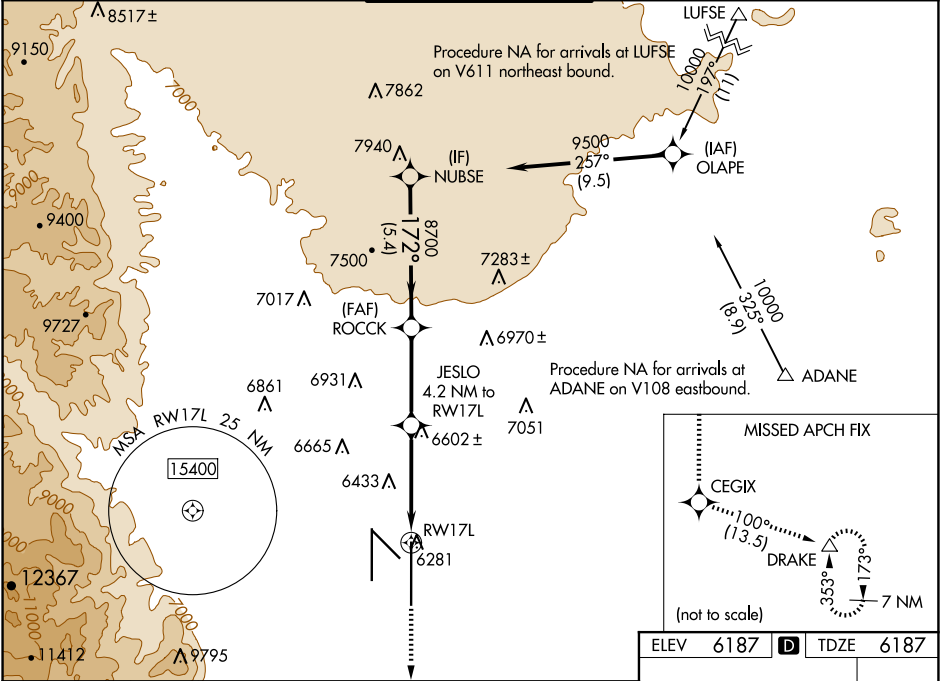

9000

CEGIX

tr

100°

DRAKE

ROCCK

8700

NUBSE

9500

JESLO

4.2 NM to RW17L

2.4 NM to RW17L

7580

172°

8700

GP 3.00°

TCH 57

2.4 NM

1.8 NM

3.5 NM

5.4 NM

CATEGORY

A

B

C

D

LPV

DA

6387/18

200 (200-½)

LNAV/VNAV

DA

6602/45

415 (500-¾)

LNAV

MDA

7000/24

7000/40

7000-1⅞

813 (900-1⅞)

CIRCLING

7000-1¼

813 (900-1¼)

7040-2½

853 (900-2½)

7260-3

1073 (1100-3)

813 (900-½)

813 (900-¾)

