

WAAS CH 99601 W22A	APP CRS 216°	Rwy Idg TDZE Apt Elev	12003 637 645
--	------------------------	-----------------------------	--


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. Dual VHF comm required. See additional requirements on AAUP. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA.



MISSED APPROACH:
Climb to 4000 direct
HWLER and hold.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725 PRM 135.775	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	---	---	---------------------------	-------

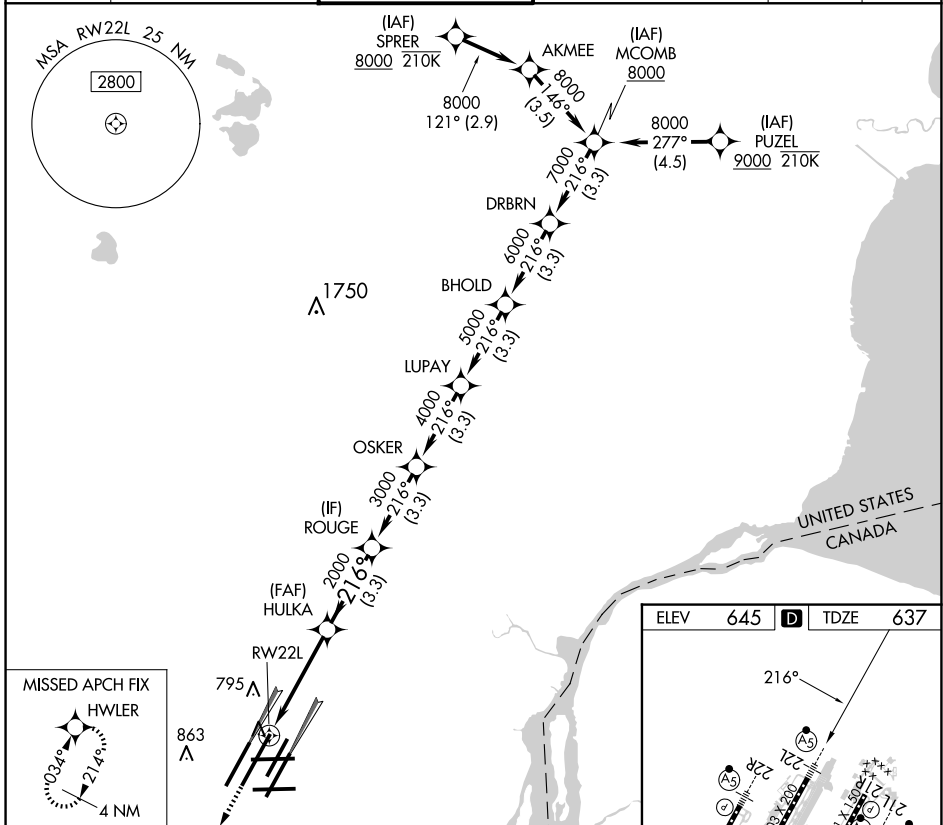

4000	HWLER	DRBRN	MCOMB	216°	8000
HULKA	ROUGE	OSKER	LUPAY	BHOLD	
2000	3000	4000	5000	6000	7000
4.3 NM	3.3 NM	3.3 NM	3.3 NM	3.3 NM	3.3 NM
GP 2.85°					TCH 60
CATEGORY	A	B	C	D	
LPV DA *		837/24	200 (200-½)		
LNAV/VNAV DA		938/24	301 (300-½)		

