

APP CRS	Rwy Idg	10000
216°	TDZE	642
	Apt Elev	645

RNAV (RNP) W RWY 22R
DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.


T For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.
Simultaneous approach authorized.
For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.

MALSFR



MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct DOHNT and hold, continue climb-in-hold to 4000.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 135.0 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
-------------------	---------------------------------	------------------------------	---	--------------------	-------

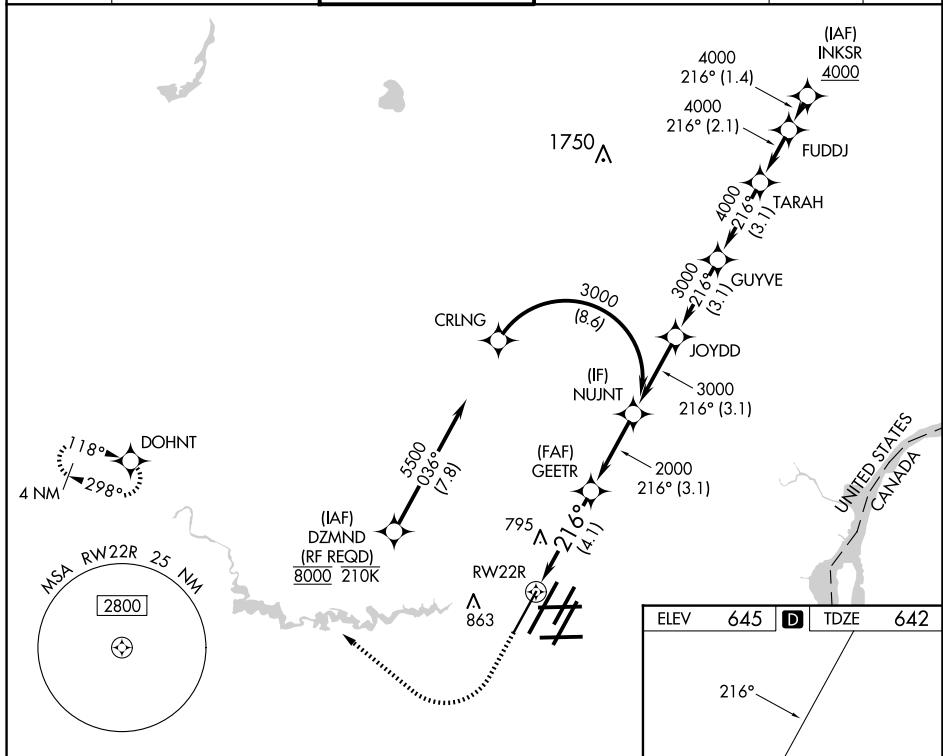

1100 ↑	4000 ↗	DOHNT ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	
CATEGORY	A	B	C	D
RNP 0.30 DA	987/30		345 (400-5%)	
AUTHORIZATION REQUIRED				

