


APP CRS	Rwy Idg	12003
216°	TDZE	637
	Apt Elev	645

RNAV (RNP) X RWY 22L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.					MALSR		MISSED APPROACH: Climb to 4000 direct HWLER and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.							
D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)		CLNC DEL 120.65	CPDLC	

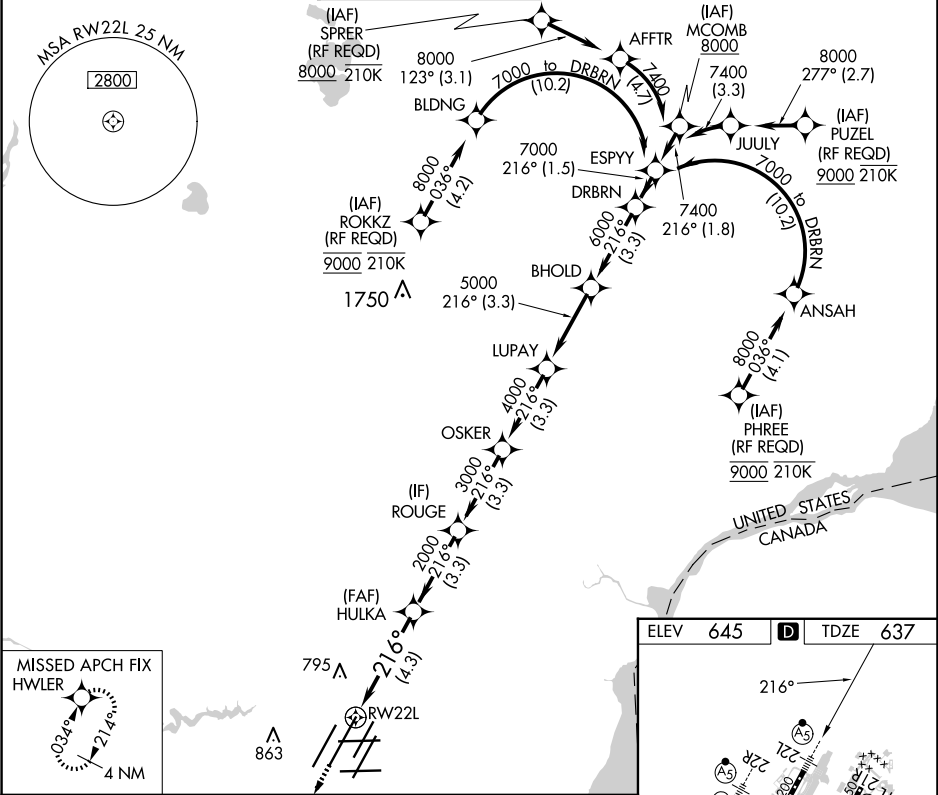

4000		HWLER		DRBRN	
RW22L		HULKA	ROUGE	OSKER	LUPAY BHOLD
2000		2000	3000	4000	5000 6000
4.3 NM		3.3 NM	3.3 NM	3.3 NM	3.3 NM
GP 2.85°		TCH 60		216° 7000	
CATEGORY	A	B	C	D	
RNP 0.15 DA	941/24		304 (300-½)		
RNP 0.30 DA	1040/40		403 (400-¾)		
AUTHORIZATION REQUIRED					

