

APP CRS	Rwy Idg	10000
170°	TDZE	485
	Apt Elev	501

RNAV (RNP) Z RWY 17R
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP AR APCH - GPS.

T For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C.
Simultaneous approach authorized.
For inop ALS, increase RNP 0.30 visibility all Cats to 1 $\frac{3}{4}$ SM.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct DAMEN and hold.

D-ATIS
118.725


LOUISVILLE APP CON
132.075 327.0

LOUISVILLE TOWER
124.2 257.8

GND CON
121.7 348.6

CLNC DEL
126 1 275 8

CPD/C

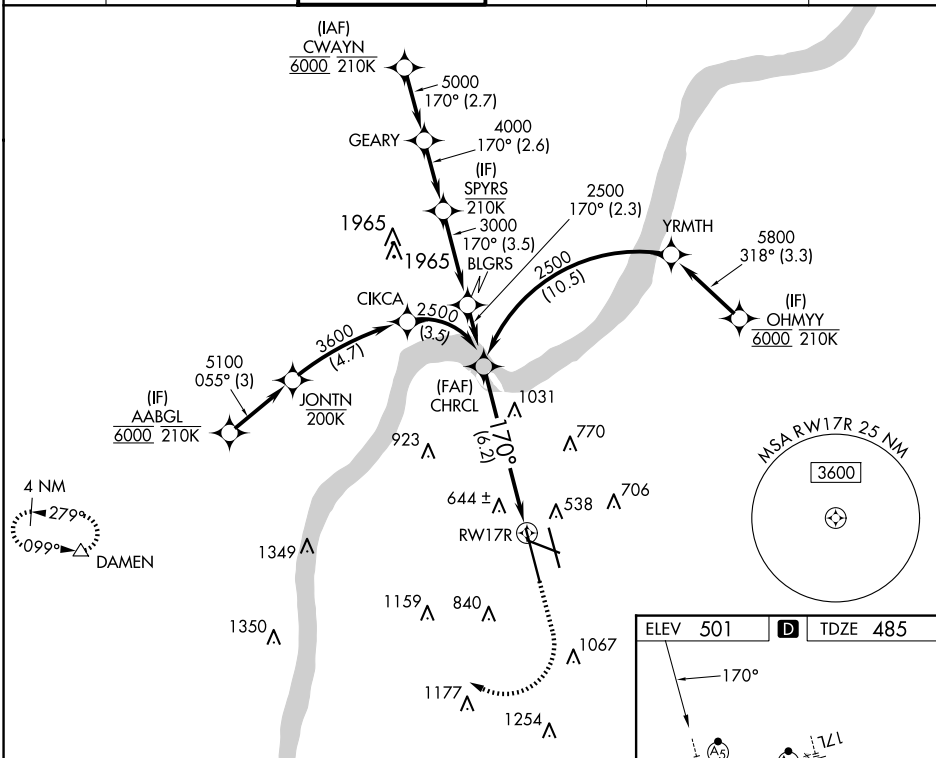


SE-1, 23 JAN 2025 to 20 FEB 2025

SE-1, 23 JAN 2025 to 20 FEB 2025


VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 64).	1600	4000	DAMEN
--	------	------	-------

See planview for multiple IF locations.

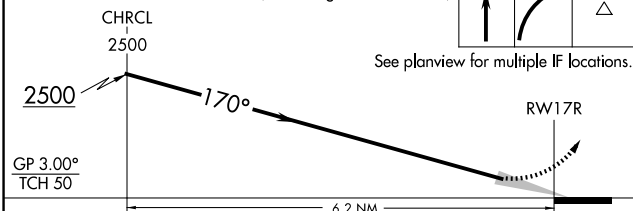

CATEGORY	A	B	C	D
RNP 0.30 DA	974/50 489 (500-1)			

AUTHORIZATION REQUIRED

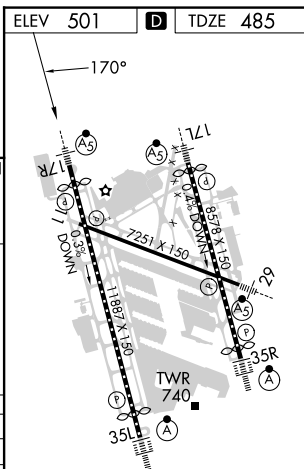

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L and 35R