


LOC/DME I-MFR	APP CRS	Rwy Idg	8800
110.3	143°	TDZE	1303
Chan 40		Apt Elev	1335


ILS or LOC RWY 14
ROGUE VALLEY INTL/MEDFORD (MFR)

DME required. DME or RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 6600 on I-MFR SE course to JLOK/I-MFR 1.6 DME and climbing right turn on heading 350° and on OED VORTAC R-160 to OED VORTAC and hold, continue climb-in-hold to 6600. #Missed approach requires minimum climb of 331 feet per NM to 4100.
⚠ Circling NA for Cats C and D northeast of Rwy 14-32. When Medford altimeter setting not received, procedure NA. For inop ALS, increase S-ILS 14 visibility to 1½ SM, increase S-LOC 14# Cats C and D visibility to RVR 5500, increase S-LOC 14 Cats C and D visibility to 2½ SM.		

ATIS	CASCADE APP CON*	MEDFORD TOWER*	GND CON	UNICOM
127.25	124.3 379.9	119.4 (CTAF) 1257.8	121.8	122.95

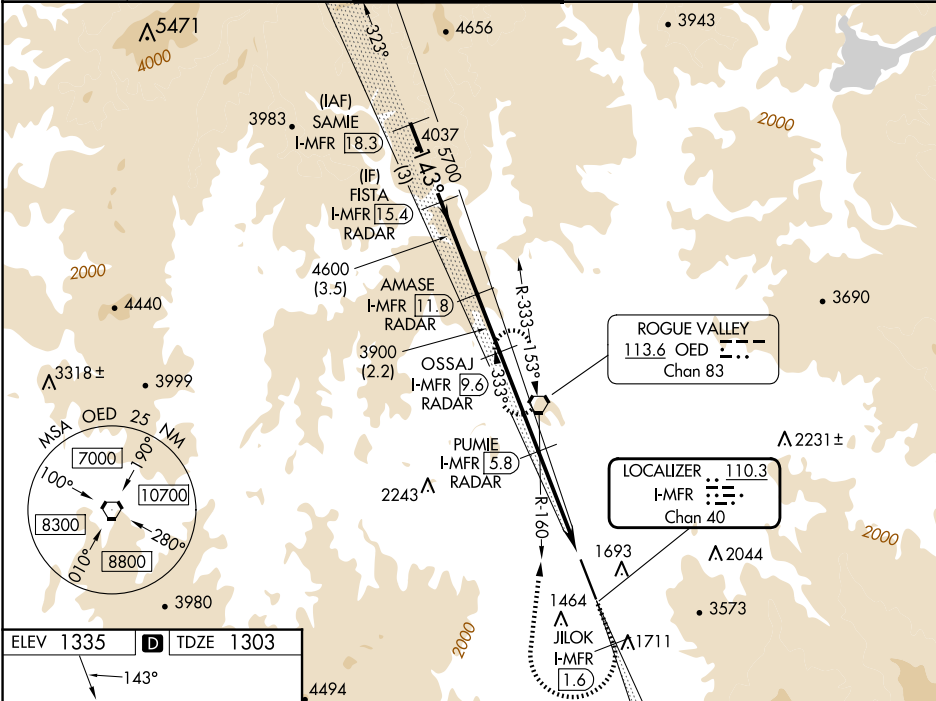

ELEV 1335	D	TDZE 1303
-----------	---	-----------

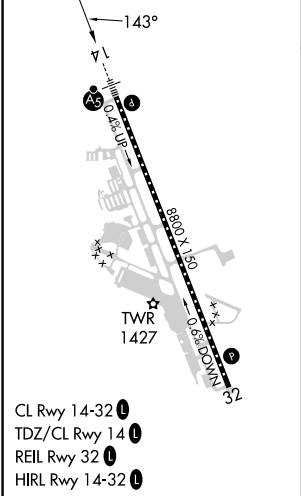

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).			
SAMIE I-MFR 18.3	FISTA I-MFR 15.4	AMASE I-MFR 11.8	OSSAJ I-MFR 9.6
7000	5700	4600	3900
GS 3.00° TCH 58	143°	3900	*2660
3 NM 3.5 NM 2.2 NM 3.8 NM 3.2 NM 1 NM			
CATEGORY	A	B	C
S-ILS 14#	1503/18	200 (200-½)	
S-ILS 14	1929-1¾	626 (600-1¾)	
S-LOC 14#	1680/24	377 (400-½)	1680/35 377 (400-¾)
S-LOC 14	2080/24 777 (800-½)	2080/40 777 (800-¾)	2080-1¾ 777 (800-1¾)
CIRCLING	2080-1 745 (800-1)	2080-1¼ 745 (800-1¼)	2080-2½ 745 (800-2½)
			2340-3 1005 (1100-3)