

WAAS CH 45742 W01A	APP CRS 011°	Rwy Idg TDZE Apt Elev	9080 704 728
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1L

GENERAL MITCHELL INTL (MKE)

RNP APCH - GPS


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to RVR 6000, increase LNAV Cat C/D visibility to RVR 6000.

ALSF-2




MISSED APPROACH: Climb to 1130 then climbing left turn to 2900 direct BAE VOR/DME and hold.

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC
------------------------	---	--	---------------------------------	--------------------------	-------

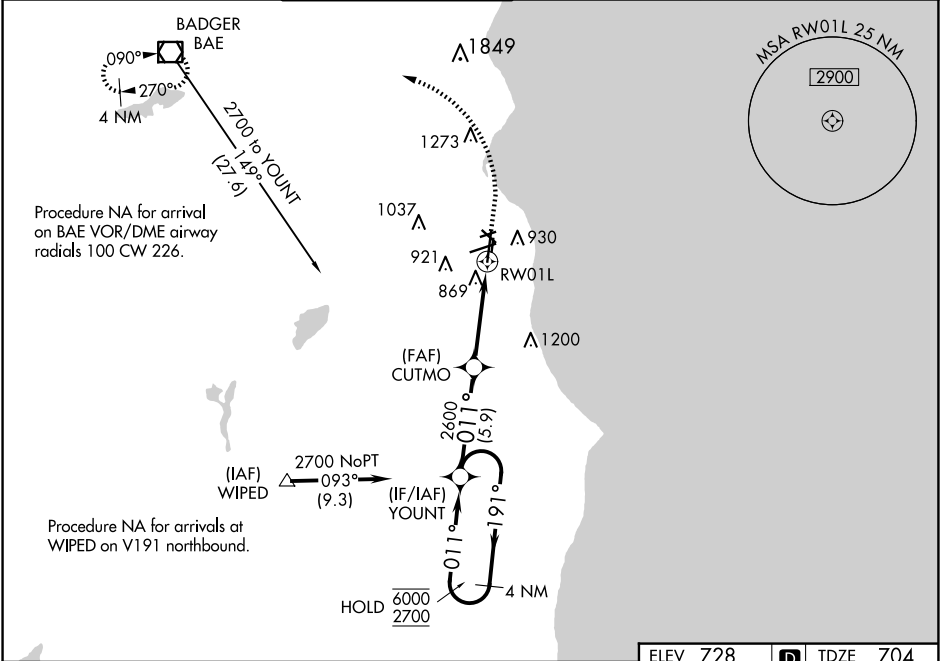

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 72).				
4 NM Holding Pattern YOUNT				
CATEGORY	A	B	C	D
LPV DA		904/18	200 (200-½)	
LNAV/VNAV DA		1120/40	416 (400-¾)	
LNAV MDA	1120/24	416 (400-½)	1120/40	416 (400-¾)
C CIRCLING	1240-1	512 (600-1)	1240-1½ 512 (600-1½)	1360-2 632 (700-2)

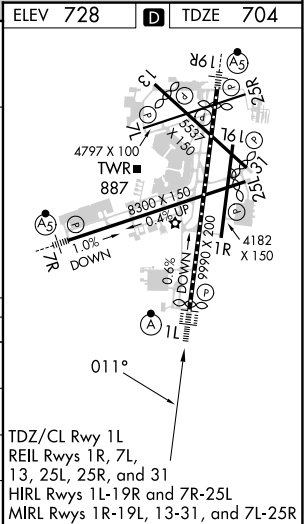

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025