
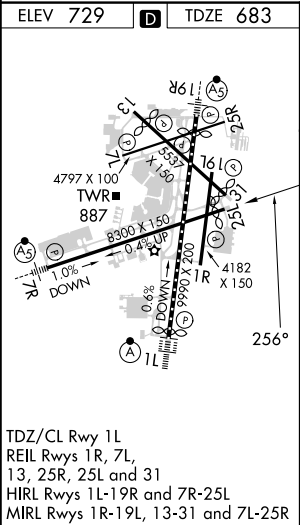



APP CRS	Rwy Idg	7867
256°	TDZE	683
	Apt Elev	729

RNAV (RNP) Y RWY 25L

GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.			MISSED APPROACH: Climb to 3700 on the RNAV missed approach route to PROOT and hold.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.					
D-ATIS	MILWAUKEE APP CON	MILWAUKEE TOWER	GND CON	CLNC DEL	CPDLC
126.4	126.5 307.0	124.575 269.05	121.8 263.125	120.8	

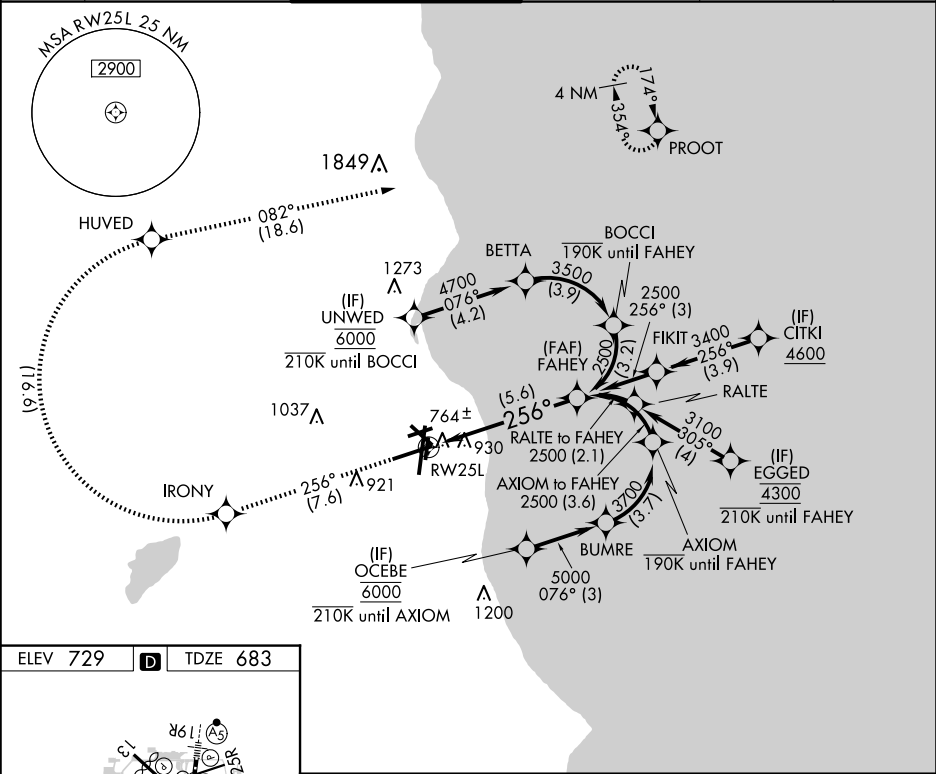

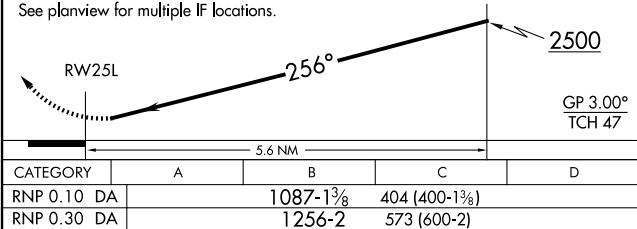3700	IRONY	HUVED	PROOT	
				
See planview for multiple IF locations.				
				
RW25L		256°	FAHEY 2500	
		5.6 NM	<u>2500</u> GP 3.00° TCH 47	
CATEGORY	A	B	C	D
RNP 0.10 DA		1087-13⁄8	404 (400-13⁄8)	
RNP 0.30 DA		1256-2	573 (600-2)	
AUTHORIZATION REQUIRED				

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025