

WAAS CH 78412 W26A	APP CRS 254°	Rwy Idg TDZE 1487 Apt Elev 1497
--	------------------------	---

RNAV (GPS) RWY 26

EASTERN OREGON RGNL AT PENDLETON (PDT)


RNP APCH.

Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
#RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4300 direct CESMI and on track 261° to PDT VORTAC and hold, continue climb-in-hold to 4300.

ASOS 118.325	SPOKANE APP CON * 133.15 379.15	PENDLETON TOWER * 119.7 (CTAF) 257.8	GND CON 121.9 257.8	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

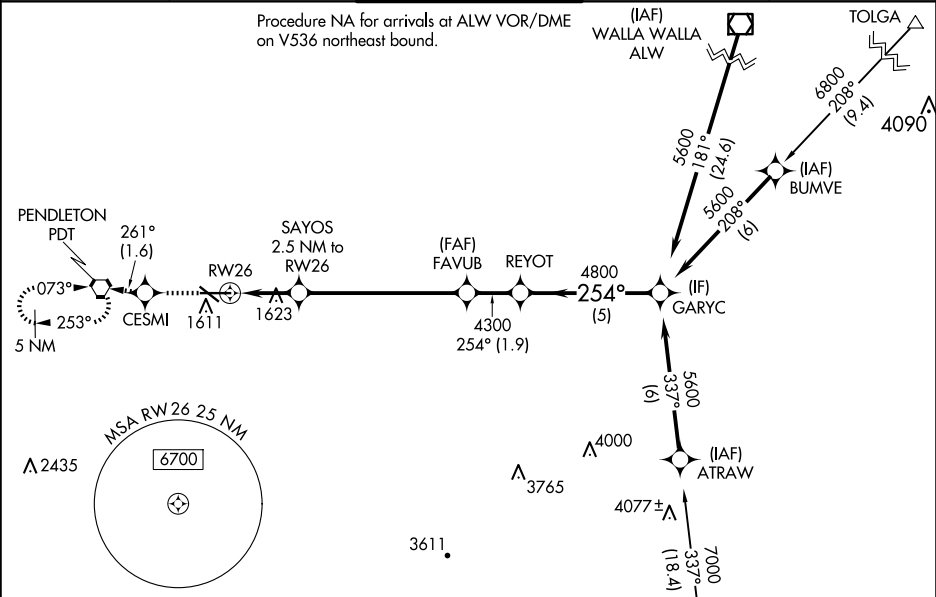

ELEV **1497** **D** TDZE **1487**

REIL Rwy 11 and 29 **I**
MIRL Rwy 11-29 **I**
HIRL Rwy 8-26 **I**

Procedure NA for arrivals at LACED on V4 southeast bound.

4300	CESMI	Ir 261°	PDT	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).
------	-------	---------	-----	--

*LNAV only

SAYOS 2.5 NM to RW26

*1.1 NM to RW26

RW26

FAVUB 4300

REYOT 4800

GARYC 5600

2320*

GP 3.00° TCH 55

CATEGORY	A	B	C	D
LPV DA#	1687/24 200 (200-½)			
LNAV/VNAV DA	1800/24 313 (400-½)			
LNAV MDA	1880/24 393 (400-½)		1880/40 393 (400-¾)	
C CIRCLING	1920-1 423 (500-1)	1960-1 463 (500-1)	1980-1½ 483 (500-1½)	2200-2¼ 703 (800-2¼)