

ILS or LOC Y RWY 18L


| | | |
|---------------------------|-------------------------|--|
| LOC I-VAD 109.3 | APCH CRS 183° | Rwy Idg TDZE Arprt Elev 9300 233 233 |
|---------------------------|-------------------------|--|

[USAF]



MOODY AFB (KVAD)

| | | | | |
|--|--|----------------|--|--|
| RADAR or DME required | | ALS-F1 (A1) | MISSED APPROACH: Climb to 3000 on VAD TACAN R-183 to EQUIP and hold. | |
| * When ALS inop, increase RVR to 40 and vis to 3/4 mile. ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 1/8 miles. | | | | |

| | | | | |
|------------------------|--|--|--------------------------------|----------------------------------|
| ATIS ★ 273.5 | VALDOSTA APP CON 126.6 285.6 | TOWER ★ 128.45 (CTAF) 257.625 | GND CON 138.95 275.8 | CLNC DEL 120.625 296.7 |
|------------------------|--|--|--------------------------------|----------------------------------|

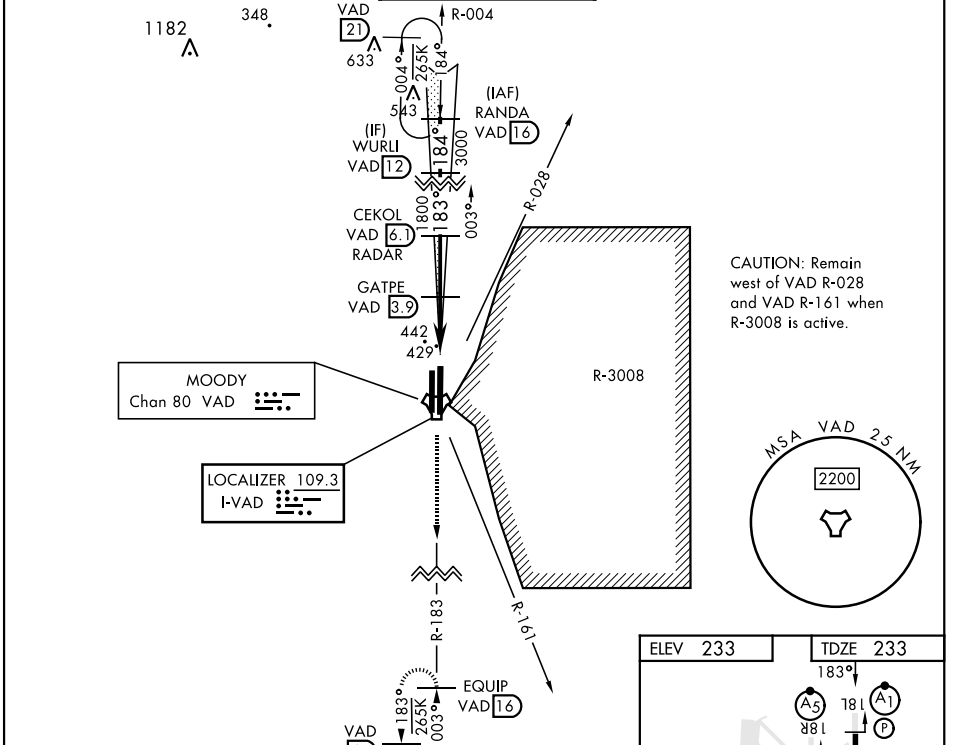

EMERG SAFE ALT 100 NM 3300

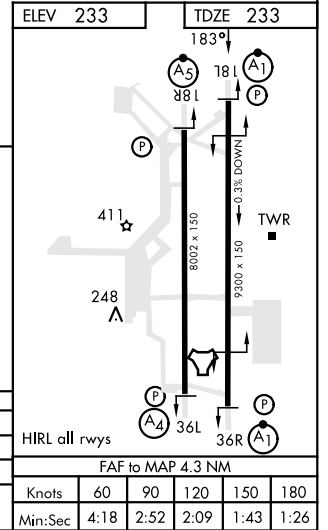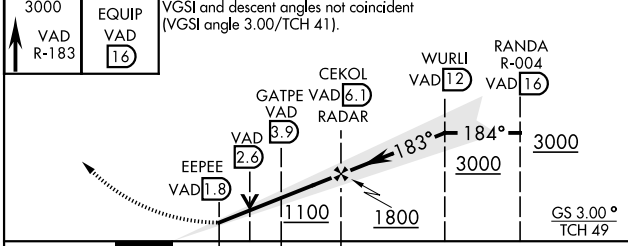

| | | | | | | |
|-------------|---------------------------------|-------------------------|-------------------|------|------|------|
| CATEGORY | A | B | C | D | E | |
| | S-ILS 18L* 433/24 200 (200-1/2) | | | | | |
| S-LOC 18L** | 680/24 447 (500-1/2) | 680/45 447 (500-3/8) | | | | |
| ◉ CIRCLING | 760-1 527 (600-1) | 760-1 1/2 527 (600-1/2) | 800-2 567 (600-2) | | | |
| Knots | | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | | 4:18 | 2:52 | 2:09 | 1:43 | 1:26 |

ILS or LOC Y RWY 18L

SE-4, 23 JAN 2025 to 20 FEB 2025

SE-4, 23 JAN 2025 to 20 FEB 2025