



ILS or LOC RWY 18L

LOC I-RUK 110.55		APCH CRS 175°		Rwy Idg TDZE Arprt Elev	9001 1382 1382	AL-482 [USAF]		ALTUS AFB (KLTS)			
DME or RADAR required.						SALSF 	MISSED APPROACH: Climb to 4000, intercept LTS VORTAC R-172 to CIPNO and hold.				
▽** When ALS inop, increase RVR to 55 and vis to 1 mile. ▽** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1/8 miles.											
ATIS ★		FORT WORTH CENTER		APP CON		TOWER ★		GND CON		CLNC DEL	
109.8 273.5		133.5 350.35		125.1 353.7		119.65 254.4		121.85 275.8		120.65 284.7	

***Circling not authorized W of Rwy 18R-36L.

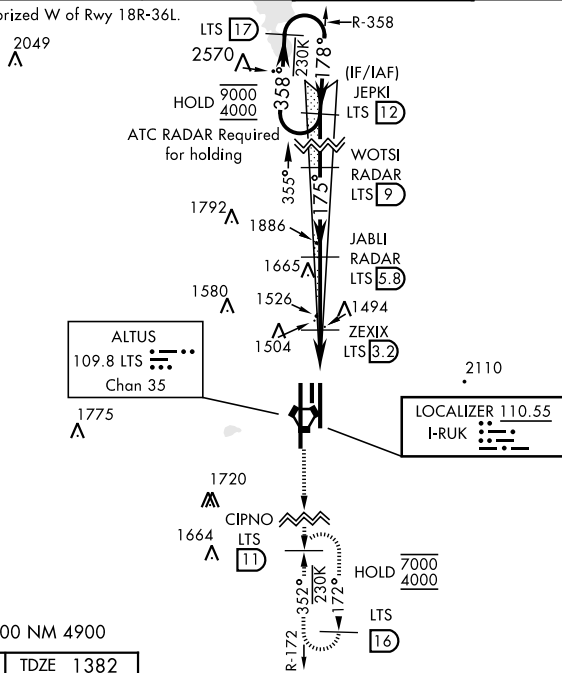

EMERG SAFE ALT 100 NM 4900

Category	A	B	C	D	E
S-ILS 18L		1582/40	200	(200-¾)	
S-LOC 18L *		1760/40	378	(400-¾)	
CIRCLING ***	1780-1 398 (400-1)	1840-1 458 (500-1)	1880-1½ 498 (500-1½)	2080-2¼ 698 (700-2¼)	2180-2¾ 798 (800-2¾)
WITHOUT LAST STEPDOWN FIX					
S-LOC 18L **	2040/40	658 (700-¾)	2040-1⅝	658	(700-1⅝)
CIRCLING ***	2040-1	658 (700-1)	2040-1⅞ 658 (700-1⅞)	2080-2¼ 698 (700-2¼)	2180-2¾ 798 (800-2¾)

ALTUS, OKLAHOMA
Amdt 5 20APR23

34° 40' N-99° 16' W

ALTUS AFB (KLTS)

ILS or LOC RWY 18L