# RNAV (GPS) RWY 13

KEARNEY RGNL (EAR)

| WAAS | APP CRS | Rwy Idg | 4498 |
|---|---|---|---|
| CH 65631 | 136° | TDZE | 2130 |
| W13A | | Apt Elev | 2131 |

RNP APCH.

T A Baro-VNAV and VDP NA when using Holdrege altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. When local altimeter setting not received, use Holdrege altimeter setting: increase LPV DA to 2407 feet and all Cats visibility ⅛ SM; increase LNAV/VNAV DA to 2457 feet and all Cats visibility ⅜ SM and all MDAs 80 feet; increase visibility LNAV and Circling Cat C ⅛ SM.

MISSED APPROACH: Climb to 4300 direct VIGXI and on track 070° to LENIY and hold.

| AWOS-3PT | MINNEAPOLIS CENTER | UNICOM |
|---|---|---|
| 123.875 | 119.4 278.8 | 123.0 (CTAF) L |

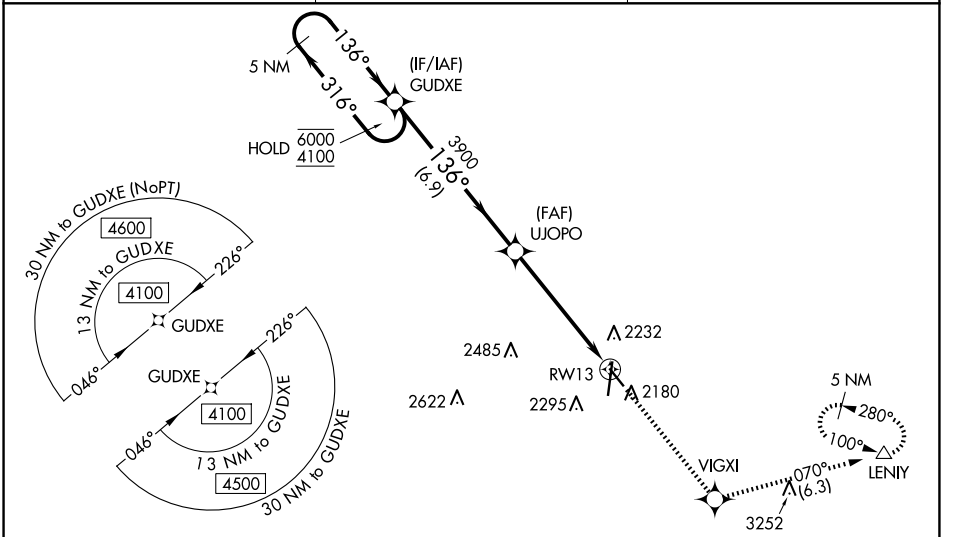


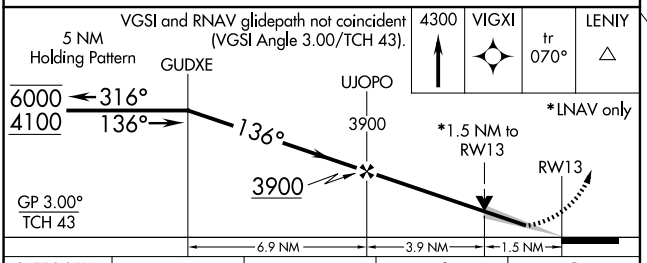


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 2330-¾ 200 (200-¾) | | | NA |
| LNAV/VNAV DA | 2380-¾ 250 (300-¾) | | | NA |
| LNAV MDA | 2720-1 590 (600-1) | | 2720-1¾ 590 (600-1¾) | NA |
| C CIRCLING | 2720-1 589 (600-1) | | 2720-1¾ 589 (600-1¾) | NA |

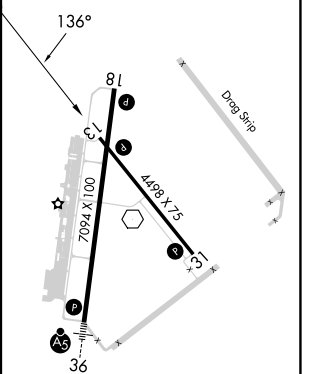


HIRL Rwy 18-36 L
MIRL Rwy 13-31 L
REIL Rwy 18 L



NC-2, 23 JAN 2025 to 20 FEB 2025
NC-2, 23 JAN 2025 to 20 FEB 2025