

WAAS CH <b>45813</b> <b>W35B</b>	APP CRS <b>005°</b>	Rwy ldg <b>10000</b> TDZE <b>88</b> Apt Elev <b>96</b>
--	------------------------	--

# RNAV (GPS) RWY 35L

ORLANDO INTL (MCO)



RNP APCH - GPS

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. Bright lights on highway midway between Rwy 35L and Rwy 35R may be mistaken for runway lights. Simultaneous approach authorized with Rwy 35R, Rwy 36L, or Rwy 35R and Rwy 36R. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 5100 and LNAV Cts C/D visibility to RVR 6000.





MISSED APPROACH:  
Climb to 4000 direct SACRO and hold.

D-ATIS ARR <b>121.25</b> DEP <b>120.525</b>	ORLANDO APP CON <b>124.8 307.0</b>	ORLANDO TOWER <b>118.45 253.5</b> (Rwys 17L-35R, 17R-35L) <b>124.3 253.5</b> (Rwys 18L-36R, 18R-36L)	GND CON <b>126.4</b> (East) <b>121.8</b> (West)	CLNC DEL <b>134.7</b> <b>341.7</b>	CPDLC
---	---------------------------------------	--	---	--	-------

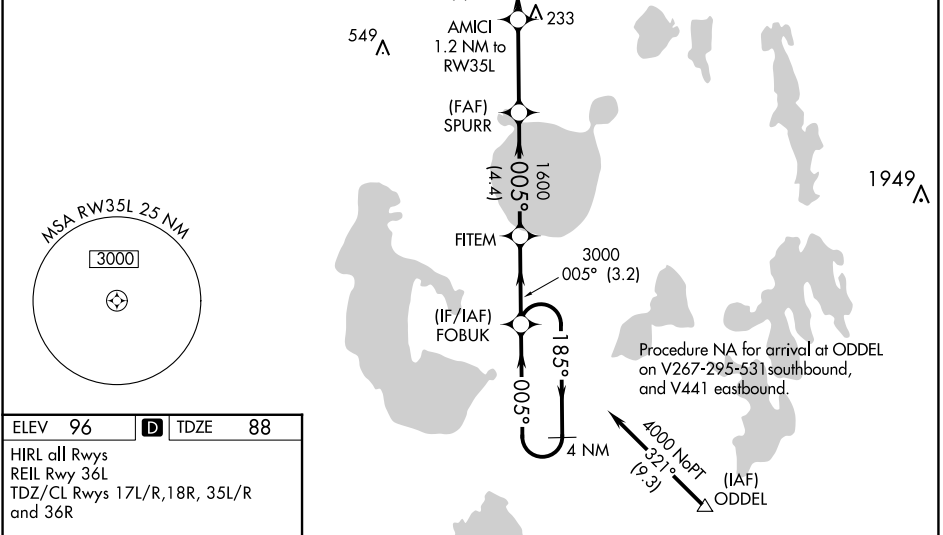

ELEV <b>96</b>	<b>D</b>	TDZE <b>88</b>
----------------	----------	----------------

HIRL all Rwys  
REIL Rwy 36L  
TDZ/CL Rwys 17L/R, 18R, 35L/R and 36R

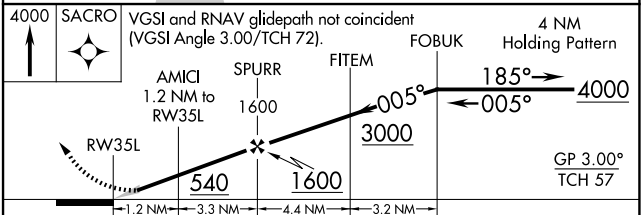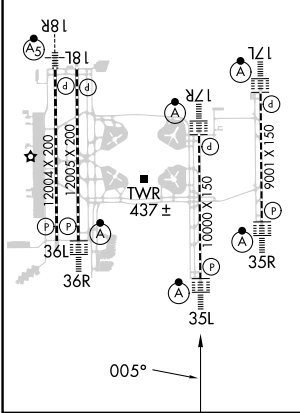

CATEGORY	A	B	C	D
LPV DA		288/18	200 (200-1/2)	
LNAV/VNAV DA		407/27	319 (400-3/4)	
LNAV MDA	500/24	412 (500-1/2)	500/40	412 (500-3/4)
<b>C</b> CIRCLING	740-1	644 (700-1)	740-1 3/4 644 (700-1 3/4)	740-2 644 (700-2)

SE-3, 23 JAN 2025 to 20 FEB 2025

SE-3, 23 JAN 2025 to 20 FEB 2025