

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 73020 W17A | APP CRS 174° | Rwy Idg TDZE Apt Elev | 8600 470 470 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 17L



TSTC WACO (CNW)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.

MISSED APPROACH: Climb to 2300 direct OMOBE and hold.

| | | | | |
|----------------------------|---|---|-------------------------|-------------------------|
| AWOS-3PT 134.225 | WACO APP CON ★ 127.65 227.125 | TSTC TOWER ★ 124.0 (CTAF) 255.7 | GND CON 121.7 | UNICOM 122.95 |
|----------------------------|---|---|-------------------------|-------------------------|

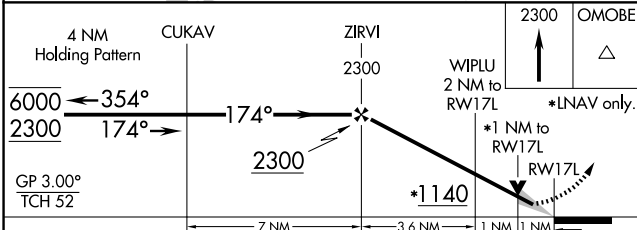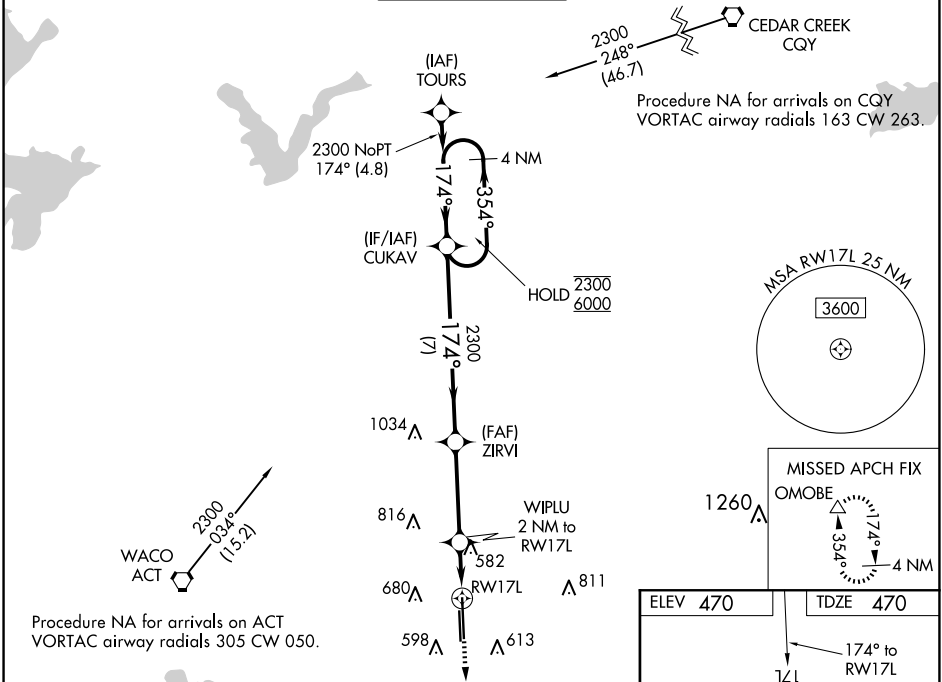

| CATEGORY | A | B | C | D |
|--------------|----------------------|-----------------------|-------------------------|-----------------------|
| LPV DA | | 670-½ | 200 (200-½) | |
| LNAV/VNAV DA | | 720-½ | 250 (300-½) | |
| LNAV MDA | 840-½ | 370 (400-½) | 840-⅝ | 370 (400-⅝) |
| CIRCLING | 940-1 470 (500-1) | 1040-1 570 (600-1) | 1040-1½ 570 (600-1½) | 1120-2 650 (700-2) |

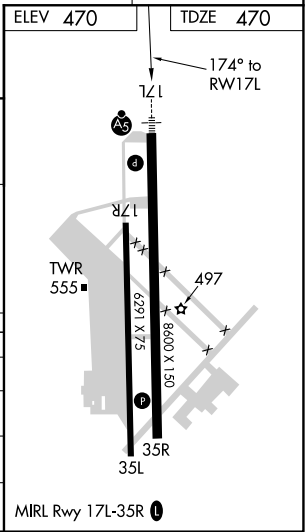

SC-3, 23 JAN 2025 to 20 FEB 2025

SC-3, 23 JAN 2025 to 20 FEB 2025