

WAAS CH 45714 W09A	APP CRS 094°	Rwy Idg 7201 TDZE 771 Apt Elev 782
--	------------------------	---

RNAV (GPS) RWY 9
BISHOP INTL (FNT)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, **A** increase LNAV Cat C/D visibility to 1½ SM.
**RVR 1800 authorized with use of FD or AP or HUD to DA.



MISSED APPROACH: Climb to 3000
direct JUBUG and on track 099° to
KATTY and hold.

ATIS 133.15	GREAT LAKES APP CON ★ 118.8 257.9	FLINT TOWER ★ 126.3 (CTAF) 0 257.9	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
----------------	--------------------------------------	---------------------------------------	------------------	--------------------	------------------

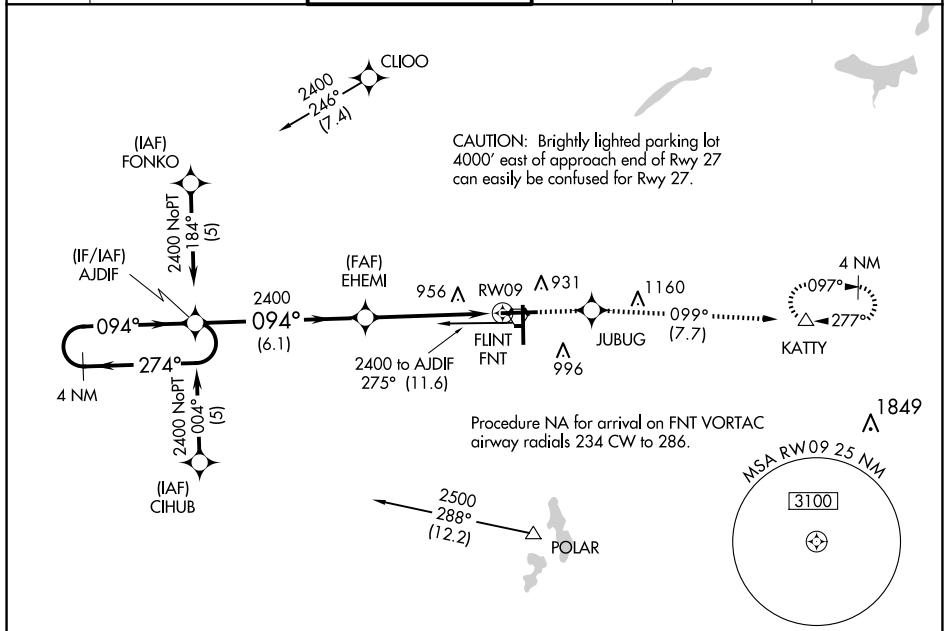


Diagram illustrating the RW09 Holding Pattern. The pattern is a 4 NM Holding Pattern with a 2400 MSL altitude. The inbound leg is 1.4 NM to RW09, and the outbound leg is 1.4 NM. The pattern is oriented 094°/274°. The diagram also shows the VGS and RNAV glidepaths not coincident (VGS Angle 3.00/TCH 63).

