


LOC I-GPI	APP CRS	Rwy Idg	9007
111.5	020°	TDZE	2966
		Apt Elev	2977

ILS or LOC RWY 2

GLACIER PARK INTL (GPI)

DME required. RNAV 1-GPS or RADAR required for procedure entry.			MALSR	MISSED APPROACH: Climb to 4100 then climbing left turn to 12000 on heading 190° and FCA VOR/DME R-238 to KILLY/15.7 DME and hold, continue climb-in-hold to 12000.
Inop table does not apply to S-LOC 2 Cats C/D.				
-15°C				
ATIS	SALT LAKE CENTER	GLACIER TOWER★	GND CON	UNICOM
132.625	127.075 244.875	124.55 (CTAF) 0	121.6	122.95

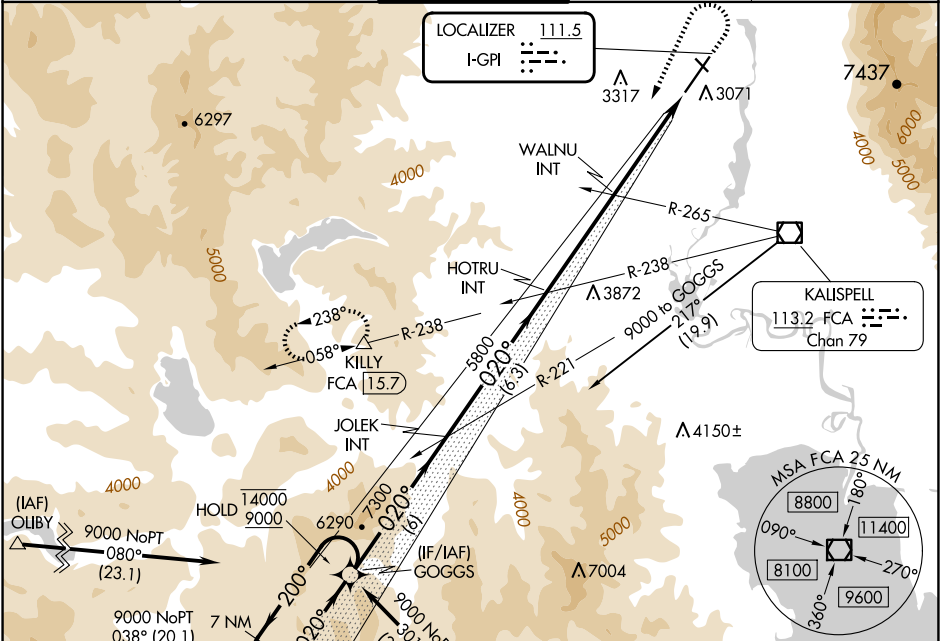

7 NM Holding Pattern		GOGGS		JOLEK INT		HOTRU INT		WALNU INT		KILLY																
14000 ← 200°		9000 → 020°		020°		020°		020°		020°																
GS 3.00°		TCH 51		5800		5800		5800		5800																
6 NM		6.3 NM		4.3 NM		4.5 NM																				
CATEGORY	A	B	C	D																						
S-ILS 2	3166-1/2 200 (200-1/2)																									
S-LOC 2	4440-3/4 1474 (1500-3/4)	4440-1 1474 (1500-1)	4440-3 1474 (1500-3)																							
CIRCLING	4440-1 1/4 1463 (1500-1 1/4)	4440-1 1/2 1463 (1500-1 1/2)	4440-3 1463 (1500-3)																							
WALNU FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)																										
S-LOC 2	3520-1/2 543 (600-1)	554 (600-1/2) 603 (700-1)	3520-1 1/8 663 (700-1 1/4)	554 (600-1 1/8) 783 (800-2 1/2)																						
CIRCLING	3520-1 543 (600-1)	3580-1 603 (700-1)	3640-1 3/4 663 (700-1 3/4)	3760-2 1/2 783 (800-2 1/2)																						

