# RNAV (RNP) Y RWY 2

GLACIER PARK INTL (GPI)

| APP CRS | Rwy Idg | 9007 |
|---|---|---|
| 020° | TDZE | 2966 |
| | Apt Elev | 2977 |

T A -15°C

RF and GPS required. Missed approach requires RNP less than 1.0. For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 43°C (109°F). For inoperative MALSR increase RNP 0.10* visibility to 1¼ and RNP 0.30 visibility to 2.
*Missed approach requires minimum climb of 220 feet per NM to 6100.

MALSR

MISSED APPROACH: Climb to 10000 via left turn to JOGAD, and via left turn to ROYOG and via left turn to TONUY, and via 121° track to WILTO and via 129° track to ANGIL and hold.

| ATIS | SALT LAKE CENTER | GLACIER TOWER * | GND CON | UNICOM |
|---|---|---|---|---|
| 132.625 | 127.075 244.875 | 124.55 (CTAF) L | 121.6 | 122.95 |

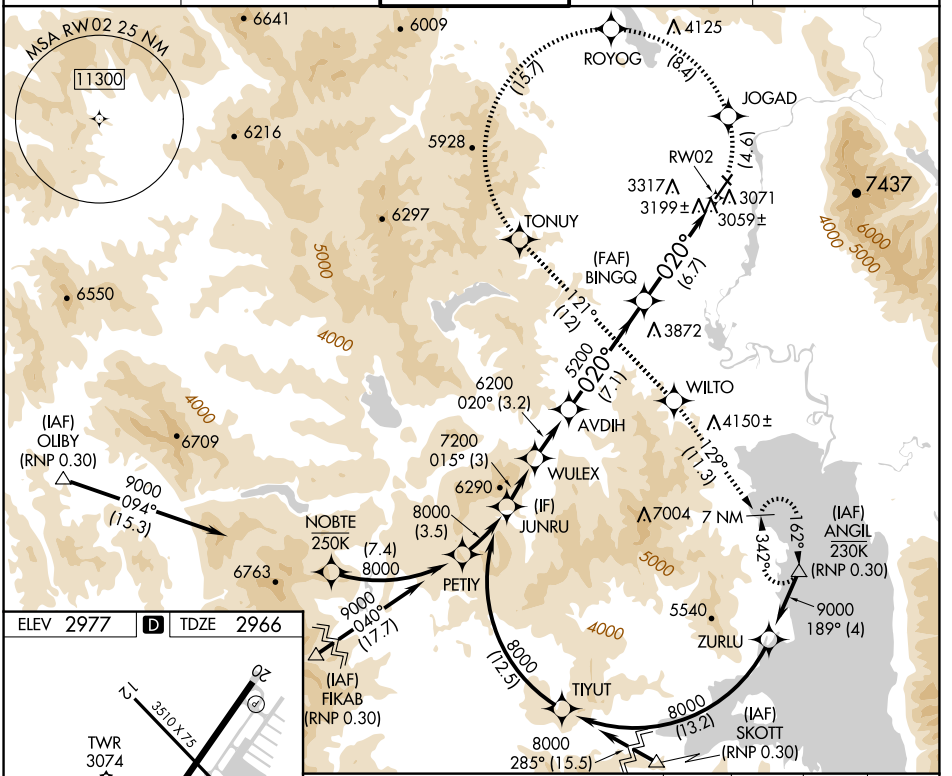


ELEV 2977 D TDZE 2966

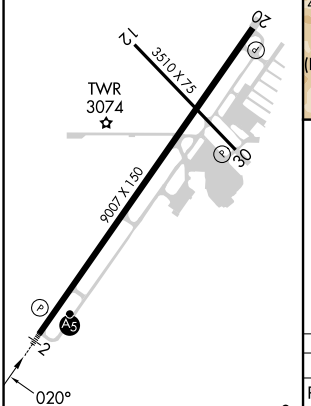


REIL Rwy 20 L
MIRL Rwy 12-30 L
HIRL Rwy 2-20 L

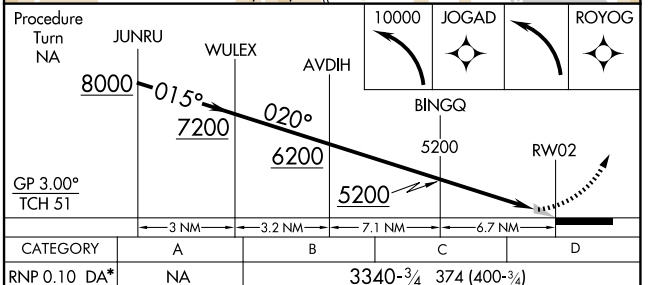


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.10 DA* | NA | 3340-¾ 374 (400-¾) | | |
| RNP 0.30 DA | NA | 3522-1½ 556 (600-1½) | | |

AUTHORIZATION REQUIRED



NW-1, 23 JAN 2025 to 20 FEB 2025
NW-1, 23 JAN 2025 to 20 FEB 2025