

WAAS CH 86620 W36A	APP CRS 358°	Rwy Idg TDZE Apt Elev	5998 202 206
--	------------------------	-----------------------------	---




RNAV (GPS) RWY 36
PINEBLUFF RGNL/GRIDER FLD (PBF)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 42°C. When local altimeter setting not received, use Stuttgart altimeter setting and increase LPV DA to 527 feet. Increase LNAV/VNAV DA to 562 feet. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2000 direct WAGGG and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

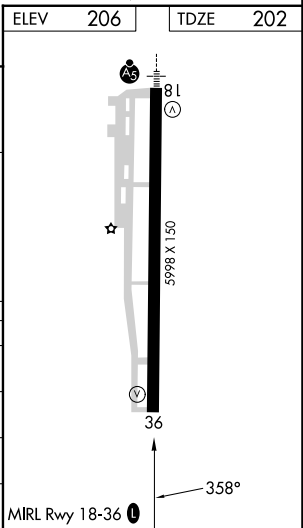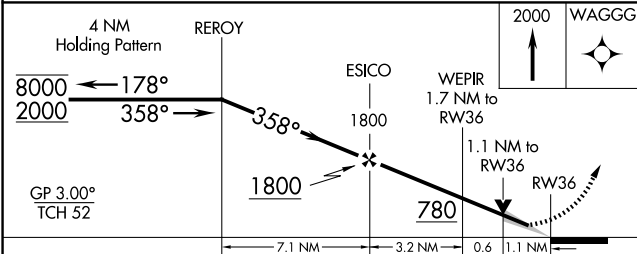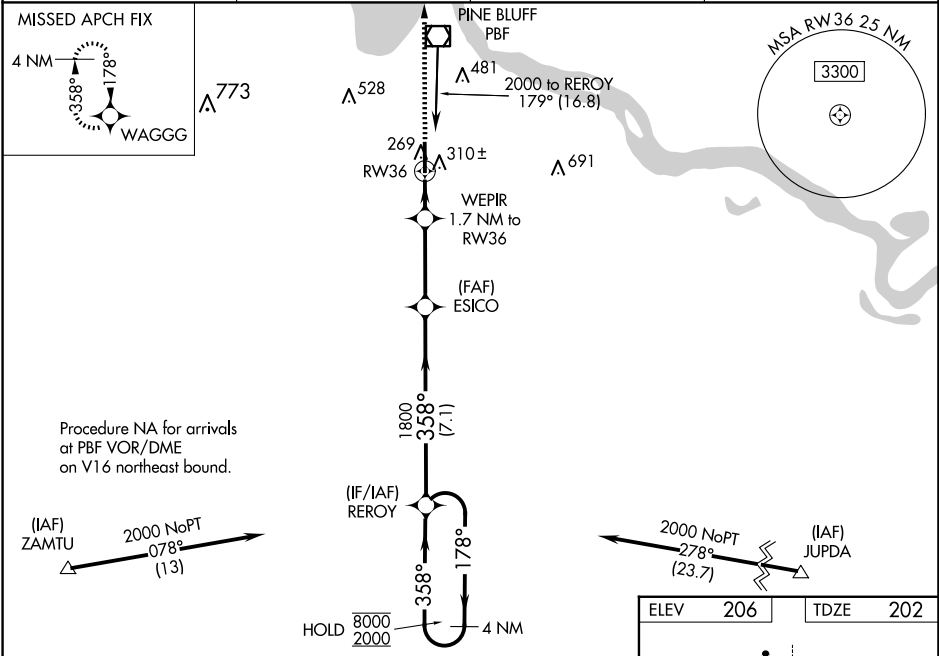

CATEGORY	A	B	C	D
LPV DA	452-1	250 (300-1)		
LNAV/VNAV DA	487-1	285 (300-1)		
LNAV MDA	600-1	398 (400-1)	600-1 1/8	398 (400-1 1/8)
CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	840-1 3/4 634 (700-1 3/4)	880-2 1/4 674 (700-2 1/4)

SC-1, 23 JAN 2025 to 20 FEB 2025

SC-1, 23 JAN 2025 to 20 FEB 2025