

WAAS CH 70410 W22A	APP CRS 216°	Rwy Idg 10000 TDZE 1166 Apt Elev 1189
--	------------------------	--

RNAV (GPS) Y RWY 22
GRANT COUNTY INTL (MWH)

RNP APCH.

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C. Baro-VNAV and VDP NA when using Ephrata altimeter setting. When local altimeter setting not received, use Ephrata altimeter setting; increase all DA 36 feet and all MDA 40 feet, increase LNAV/VNAV all Cats visibility and LNAV Cats C and D visibility $\frac{1}{2}$ SM and Circling Cat D visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 4000 direct
ONPIC and hold.

ATIS 119.05	GRANT COUNTY APP CON ★ 126.4 379.95	GRANT COUNTY TOWER ★ 118.25 (CTAF) 0 257.8 (EAST) 128.0 257.8 (WEST)	GND CON 121.9	UNICOM 122.95
----------------	--	--	------------------	------------------

Procedure NA for arrivals at EPH VORTAC
on airway radials 060 CW 135.

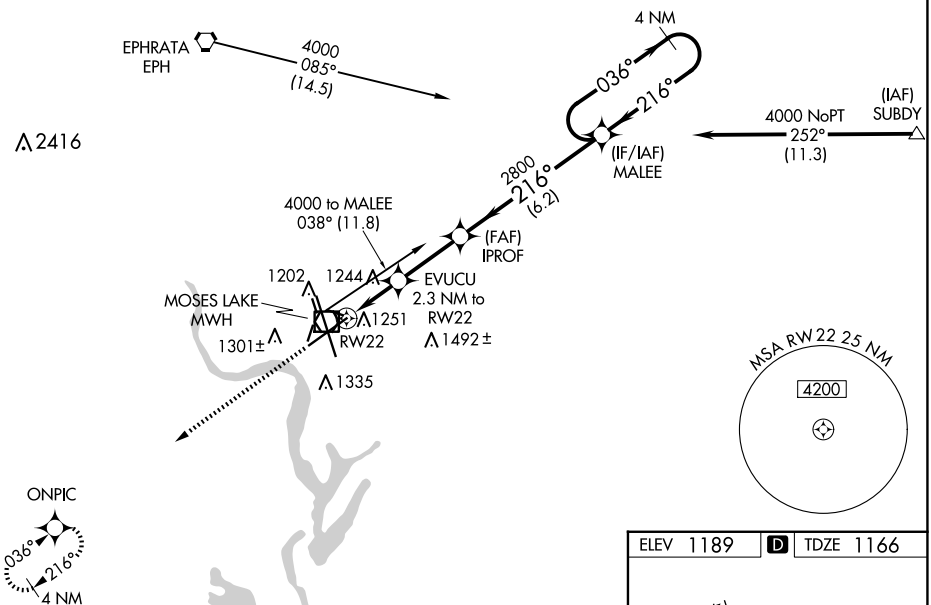


Diagram illustrating a 4 NM Holding Pattern. The pattern is defined by a 4 NM radius. Key points and distances shown include:

- 4000 (Altitude)
- ONPIC (Obstacle)
- EVUCU (2.3 NM to RW22)
- IPROF (2800)
- MALEE
- 4 NM Holding Pattern
- 036° (Heading)
- 216° (Heading)
- 4000 (Altitude)
- 1920* (Altitude)
- 2800 (Altitude)
- 0.9 (Distance)
- 1.4 NM (Distance)
- 2.7 NM (Distance)
- 6.2 NM (Distance)
- GP 3.00° (Gradient)
- TCH 50 (Threshold Crossing Height)

