


LOC I-EDF	APCH CRS	Rwy Idg
110.3	062°	10,000
		TDZE 175
		Arpt Elev 213

[USAF]


ELMENDORF AFB (PAED)

▼ * When TDZ/CL lights inop increase RVR to 24. When ALS inop, increase RVR to 40, vis to ¾ mile.	ALSIF-1 	MISSED APPROACH: Climb to 900, then climbing left turn to 3000 via EDF R-307 to HOBBS and hold.
---	-------------	---

ATIS ★	ANCHORAGE APP CON	TOWER	GND CON	CLNC DEL	PAR
124.3 273.5	118.6 290.5 (N) 123.8 259.3 (S)	127.2 352.05	121.8 275.8	128.8 306.925	

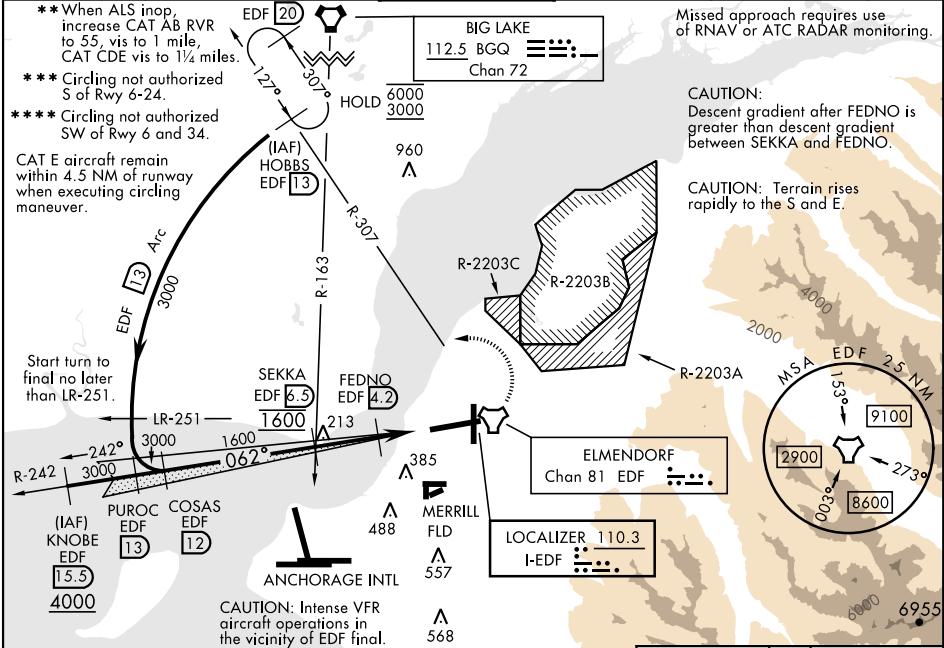

EMERG SAFE ALT 100 NM 15,300

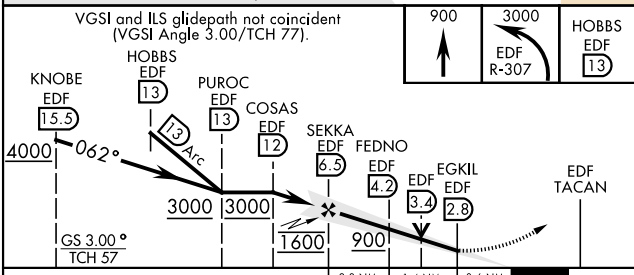

CATEGORY	A	B	C	D	E
S-ILS 6 *		375/18	200 (200-1/2)		
S-LOC 6 **	600/24	425 (400-1/2)	600/40	425 (400-3/4)	
*** CIRCLING	840-1	627 (700-1)	840-1 3/4 627 (700-1 3/4)	840-2 627 (700-2)	940-2 1/2 727 (800-2 1/2)
RWY 34 CIRCLING MINIMUMS					
**** CIRCLING	840-1	627 (700-1)	920-2 707 (800-2)	1020-2 1/2 807 (900-2 1/2)	1480-3 1267 (1300-3)

